


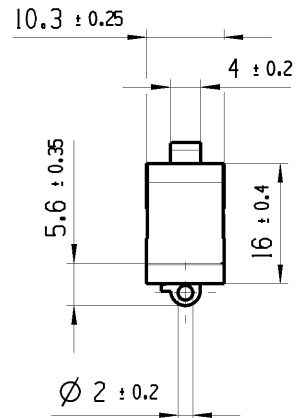


A
B
C
D
E

Ruhestellung
free position
Schaltpunkt
operating position
zul. Endstellung
total travel
position allowed

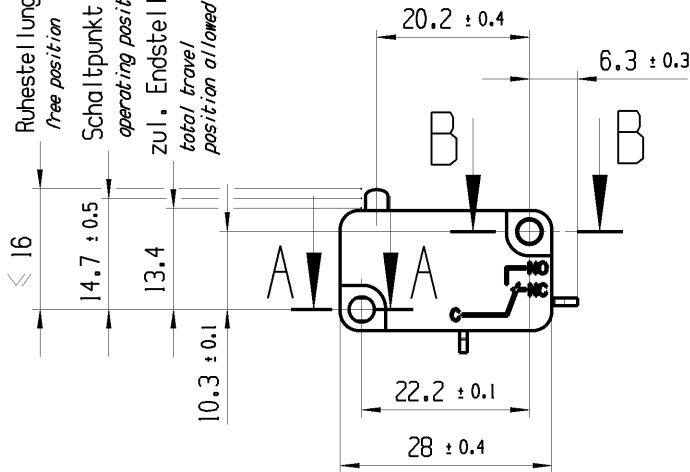

A-A
2:1

B-B
2:1



3.35 ± 0.05 x 3.08 ± 0.06

Ø 3.08 ± 0.06

Aufschrift
marking



1004 µ T100
10141A 250V AC 5E4



Oeffner 1-polig


SPNC

Schalt-Betaetigungskraft 0.8 bis 1.8 N
actuating force 0.8 up to 1.8 N

Differenzweg 0.15 bis 0.32 mm
movement differential 0.15 up to 0.32 mm

Herstellort / -jahr / -woche

date code of manufacture:
place / year / week

-		-				-		1004.0705-XX			
Figure		Type				Customer No.		Art.No.-PI			
General tolerances						Sheet 01			Ident. K	Document number 10040705	Index f
All dimensions are in millimetres		Shape and location ⊙ ≡	Angle ± 2 °	Edge tolerance 							
					0-6	± 0.1	± 0.2				
					>6-15	± 0.15	± 0.3				
					>15-30	± 0.2	± 0.5				
					>30-70	± 0.3	± 10%				
					>70-120	± 0.4					
>120	± 0.8										
f	128895	2019-10-24		MUT		Format DIN A4	Projection 	Scale 1:1	Snap action switch		
e	87269	2013-12-16		BRC							
d	56604	2008-02-08		RON							
c	29116	2000-03-23		PFU							
Index	MEC-No.	Date (YYYY-MM-DD)		Edited by		System NX V11.0			 MARQUARDT		
						Replacement of Zg.gl.Nr.v.12.02.1996					