



A
B
C
D
E

Ruhestellung
free position
Schaltpunkt
operating position
zul. Endstellung
total travel
position allowed



Aufschrift
marking

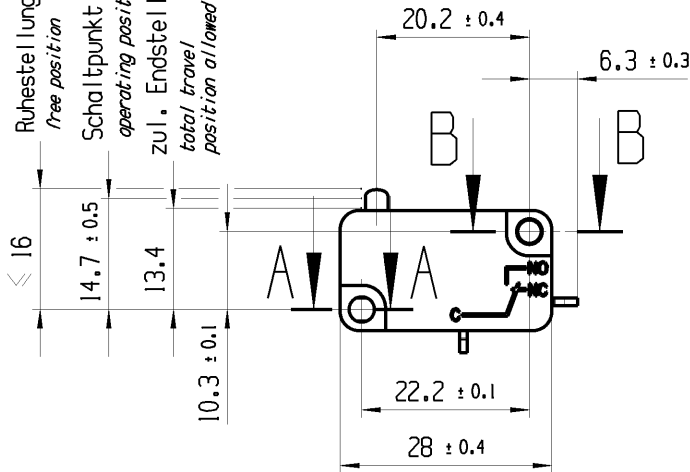


1004 µ T100
10141A 250V AC 5E4



Herstellort / -jahr / -woche
date code of manufacture:
place / year / week


A-A
2:1

3.35 ± 0.05 x 3.08 ± 0.06



B-B
2:1

Ø 3.08 ± 0.06



Oeffner 1-polig

SPNC

Schalt-Betaetigungskraft 0.8 bis 1.8 N
actuating force 0.8 up to 1.8 N

Differenzweg 0.15 bis 0.32 mm
movement differential 0.15 up to 0.32 mm

-	-	-	1004.0705-XX
Figure	Type	Customer No.	Art.No.-PI
General tolerances			
All dimensions are in millimetres	Shape and location ◎ ≡	Angle ± 2 °	Edge tolerance
f	128895	2019-10-24	MUT
e	87269	2013-12-16	BRC
d	56604	2008-02-08	RON
c	29116	2000-03-23	PFU
Index	MEC-No.	Date (YYYY-MM-DD)	Edited by
Sheet 01		Ident. K	Document number 10040705
Format DIN A4		Projection	Scale 1:1
System NX V11.0		Snap action switch	
Replacement of Zg.gl.Nr.v.12.02.1996		MARQUARDT	