



A

B

C

D

E

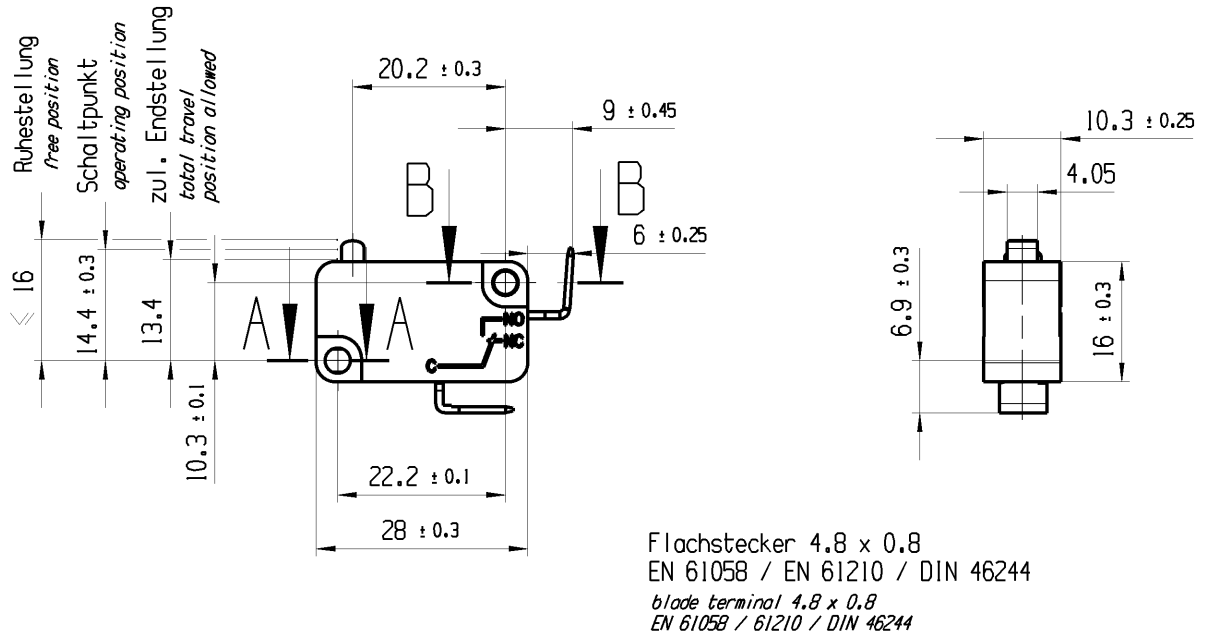

A-A
2:1

B-B
2:1

Aufschrift
marking





1005

T85
12(12)A 250V AC 5E4
10(16)A 250V AC 5E4
T100



Herstellort /- jahr / -woche
date code of manufacture:
place / year / week

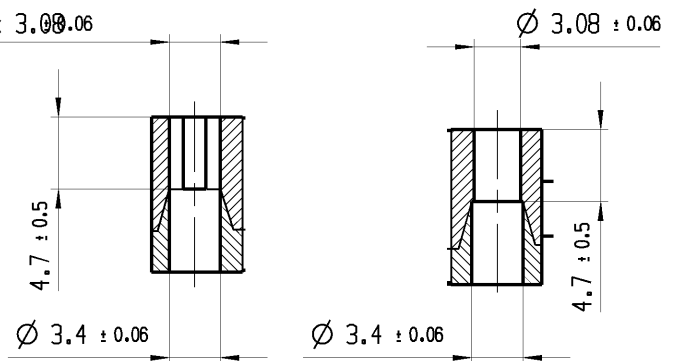


Schliesser 1-polig
SPNO

Schalt-Betaetigungskraft 3.5 bis 4.9 N
actuating force 3.5 up to 4.9 N

Differenzweg ≤ 1.2 mm
movement differential

Beim Einbau geeignete isolierte
Steckhuelsen verwenden
use suitable isolated receptacle
when mounting

-	-					-	1005.1236-XX				
Figure	Type					Customer No.		Art.No.-PI			
General tolerances						Sheet 01			Ident. K	Document number 10051236	Index a
All dimensions are in millimetres	Shape and location ⊙ ≡	Angle ± 2 °	Edge tolerance 		Length						
				0-6	± 0.1	± 0.2					
				>6-15	± 0.15	± 0.3					
				>15-30	± 0.2	± 0.5					
				>30-70	± 0.3	± 10%					
				>70-120	± 0.4						
>120	± 0.8										
							Format DIN A4	Projection 	Scale 1:1	Snap action switch	
							System NX V11.0				
a	128895		2019-10-28		HHE		Replacement of				
	100936		2016-03-21		DRI						
Index	MEC-No.		Date (YYYY-MM-DD)		Edited by						