


A

B

C


D

E

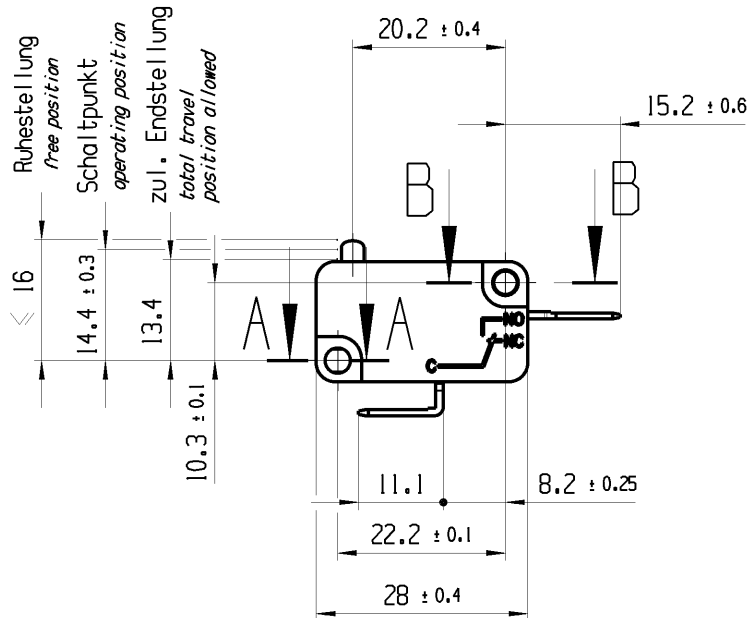

Flachstecker 6.3 x 0.8
EN 61058 / EN 61210 / DIN 46244
blade terminal 6.3 x 0.8
EN 61058 / 61210 / DIN 46244

Druecker: Duroplast rot
Actuator: Thermosetting plastic red
Gehaeuse: PA Latamid weiss
Housing: PA Latamid White



A-A
2:1

B-B
2:1

Aufschrift
marking




1005

T85
121121A 250V AC 5E4
10161A 250V AC 5E4
T100



Herstellort /- jahr / -woche
date code of manufacture:
place / year / week

Auf Verpackung 160720034C
On packaging



Schliesser 1-polig
SPNO

Schalt-Betaetigungskraft 3.5 bis 4.9 N
actuating force 3.5 up to 4.9 N

Differenzweg ≤ 1.2 mm
movement differential

-	-	-	1005.1237-XX
Figure	Type	Customer No.	Art.No.-PI
General tolerances			
All dimensions are in millimetres	Shape and location ⊙ =	Angle ± 2 °	Edge tolerance ⚡
			Length 0-6 ± 0.1 >6-15 ± 0.15 >15-30 ± 0.2 >30-70 ± 0.3 >70-120 ± 0.4 >120 ± 0.8
			Radii ± 0.2 ± 0.3 ± 0.5 ± 10%
b	128895	2019-10-28	HHE
a	111303	2017-08-24	TRIGUIK
	104355	2016-10-05	DRI
Index	MEC-No.	Date (YYYY-MM-DD)	Edited by
Sheet 01		Ident. K	Document number 10051237
Format DIN A4		Projection	Scale 1:1
System NX V11.0		Snap action switch	
Replacement of		MARQUARDT	