


A

B


C

D

E

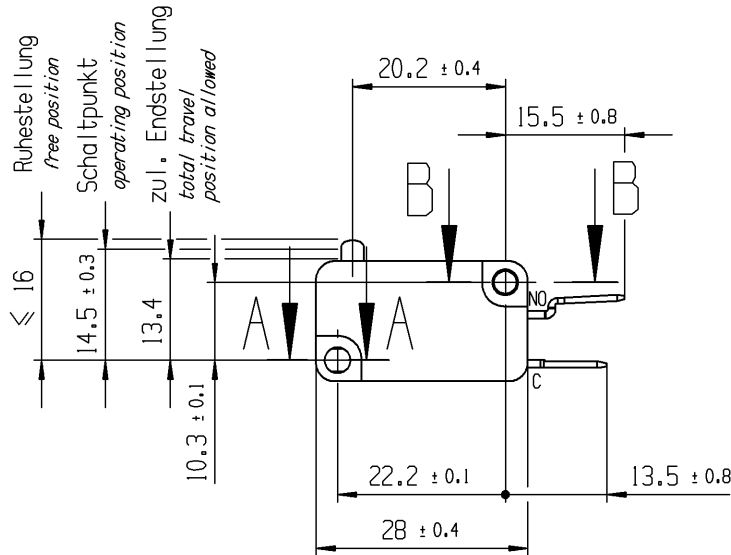

Flachstecker 4,8 x 0,8
EN 61058 / EN 61210 / DIN 46244
blade terminal 4,8 x 0,8
EN 61058 / EN 61210 / DIN 46244





A-A
2:1

B-B
2:1

3.35 ± 0.05 x 3.08 ± 0.06

Ø 3.08 ± 0.06



Aufschrift
marking




1005

10(16)A 250V AC 5E4 T100



Herstellort /- jahr / -woche
date code of manufacture:
place / year / week



Schliesser 1-polig
SPNO

Schalt-Betaetigungskraft 2.4 bis 3.8 N
actuating force 2.4 up to 3.8 N

Differenzweg ≤ 1.2 mm
movement differential

Schutzklasse nach DIN 40 050 IP 40
protection class on DIN 40 050 IP 40

-	-						-		1005.2817-XX			
Figure	Type						Customer No.		Art.No.-PI			
General tolerances							Sheet 01			Ident. K	Document number 10052817	Index a
All dimensions are in millimetres	Shape and location 	Angle ± 2 °	Edge tolerance 		Length	Radii						
				0-6	± 0.1	± 0.2						
				>6-15	± 0.15	± 0.3						
				>15-30	± 0.2	± 0.5						
				>30-70	± 0.3	± 10%						
				>70-120	± 0.4							
>120	± 0.8											
							Format DIN	Projection 	Scale 1:1			
							System NX V11.0			Snap action switch		
							Replacement of					
a	128297		2020-01-20		HHE							
	85964		2013-09-06		BRC							
Index	MEC-No.		Date (YYYY-MM-DD)		Edited by							