



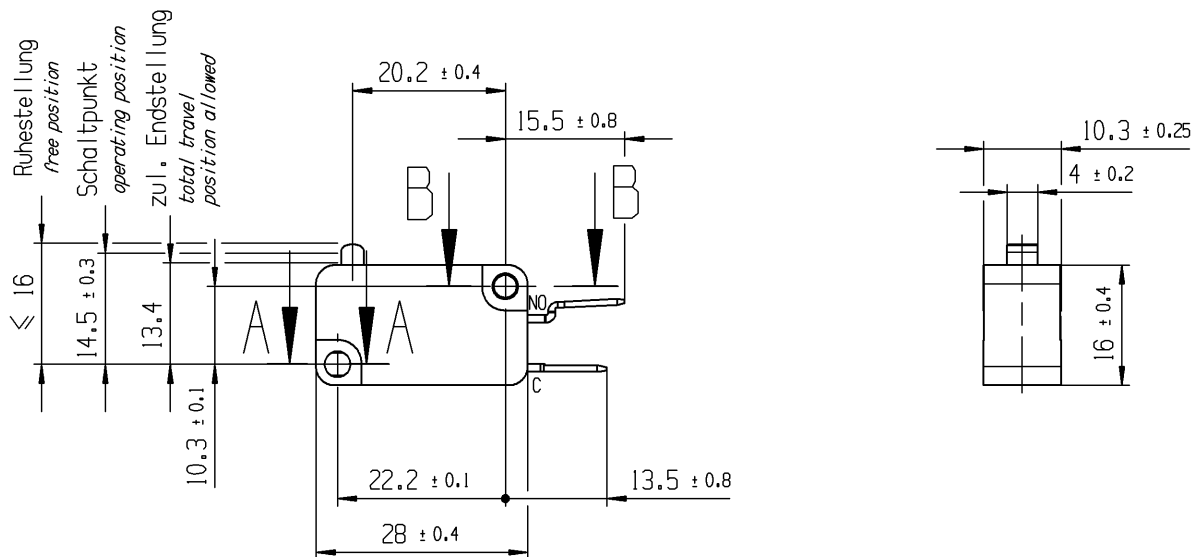

Flachstecker 4,8 x 0,8
EN 61058 / EN 61210 / DIN 46244
blade terminal 4,8 x 0,8
EN 61058 / EN 61210 / DIN 46244





A-A
2:1

B-B
2:1

3.35 ± 0.05 x 3.08 ± 0.06

Ø 3.08 ± 0.06



Aufschrift
marking




1005

10161A 250V AC 5E4 T100



Herstellort /- jahr / -woche
date code of manufacture:
place / year / week



Schliesser 1-polig
SPNO

Schalt-Betaetigungskraft 2.4 bis 3.8 N
actuating force 2.4 up to 3.8 N

Differenzweg ≤ 1.2 mm
movement differential

Schutzklasse nach DIN 40 050 IP 40
protection class on DIN 40 050 IP 40

-	-	-	1005.2817-XX							
Figure	Type	Customer No.	Art.No.-PI							
General tolerances					Sheet 01			Ident. K	Document number 10052817	Index a
All dimensions are in millimetres	Shape and location 	Angle ± 2 °	Edge tolerance 							
				0-6	± 0.1	± 0.2				
				>6-15	± 0.15	± 0.3				
				>15-30	± 0.2	± 0.5				
				>30-70	± 0.3	± 10%				
				>70-120	± 0.4					
>120	± 0.8									
					Format DIN	Projection 	Scale 1:1			
					A4					
					System NX V11.0					
a	128297	2020-01-20	HHE			Replacement of				
	85964	2013-09-06	BRC							
Index	MEC-No.	Date (YYYY-MM-DD)	Edited by							
								Snap action switch		

Ident. K
Document number 10052817
Index a
Snap action switch

MARQUARDT