


© THIS DRAWING IS THE EXCLUSIVE PROPERTY OF MARQUARDT. WITHOUT THEIR CONSENT IT MAY NOT BE REPRODUCED OR GIVEN TO THIRD PARTIES.

CONFIDENTIAL

VERTRAULICH

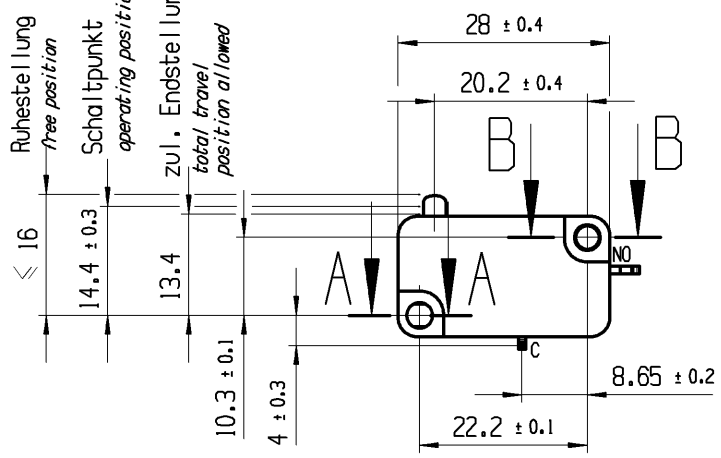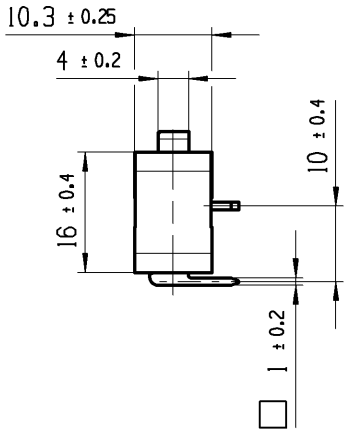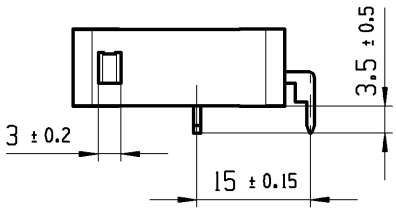


Empfohlenes Lochbild, Bestueckungsseite
Toleranzen nach DIN IEC 326
Teil 3 sehr fein
In den Durchgangsloechern fixieren

*recommended hole pattern, component side*
*tolerances according to DIN IEC 326*
*part 3 very fine*
*fixation in the clearance hole*

## Aufschrift

*marking*

M


1005 T85
12(12)A 250V AC 5E4
10(6)A 250V AC 5E4
T100


c UL us LISTED E41791

15


Herstellort / -jahr / -woche

*Code of manufacture:place / year / week*




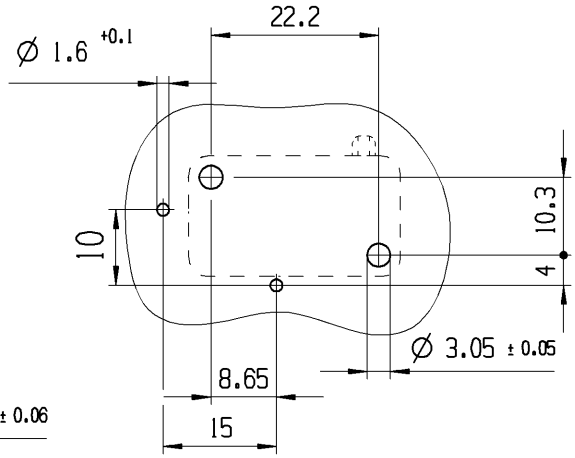
A-A
2:1




B-B
2:1

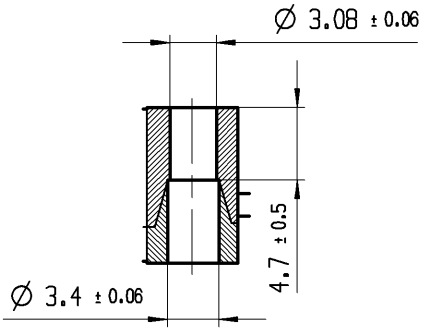


## Schliesser 1-polig

*single pole normally open*

Schalt-Betaetigungskraft 3.5 bis 4.9 N
*actuating force* *3.5 up to 4.9 N*

Differenzweg ≤ 1.2 mm
*movement differential*

| Figure | Type | Customer Part No. | Art.No.-PI |
|---|---|---|---|
| - | - | - | 1005.4006-XX |

Shape and location

Angle ± 2 °

Edge tolerance

| Length | | | | Radii | |
|---|---|---|---|---|---|
| 0-6 | ± 0.1 | | ± | 0-6 | ± 0.2 |
| >6-15 | ± 0.15 | | ± | >6-15 | ± 0.3 |
| >15-30 | ± 0.2 | | ± | >15-30 | ± 0.5 |
| >30-70 | ± 0.3 | | ± | >30-200 | ± 10% |
| >70-120 | ± 0.4 | | ± | | ± |
| >120-200 | ± 0.8 | | ± | | ± |
| | ± | | ± | | ± |
| | ± | | ± | | ± |

Sheet 01

Format DIN A4 | Projection | Scale 1:1

All dimensions are in millimetres

| Ident. | Document number | Index |
|---|---|---|
| K | 10054006 | c |

snap action switch

| Index | MEC-No. | Date (YYYY-MM-DD) | Edited by |
|---|---|---|---|
| c | 145807 | 2023-01-19 | ABASSIAI |
| b | 128895 | 2020-01-14 | HHE |
| a | 85443 | 2013-09-24 | BRC |
| | 61826 | 2009-10-21 | MTR |

System NX V11.0

Replacement of Zg.gl.Nr.v.09.01.2009

MARQUARDT

© Alle Rechte bei Marquardt, auch fuer den Fall von Schutzrechtsanmeldungen. Jede Verfuegungsbefugnis, wie Kopier- und Weitergaberecht, bei uns.