

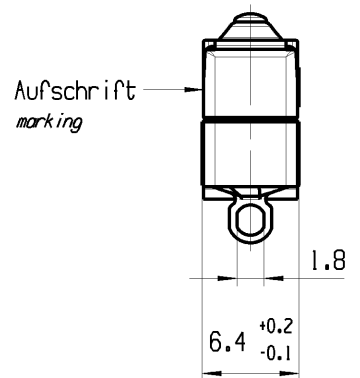



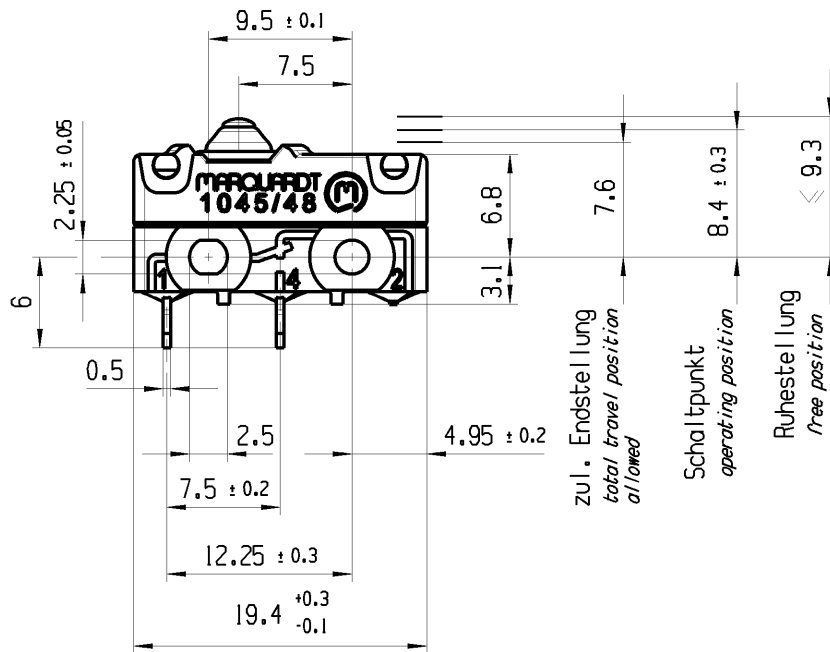

Aufschrift
Marking



NO
4
I
C

Schliesser 1-polig
single pole normally open

Schaltbetaetigungskraft ≤ 2.6 N
actuating force


Rueckschaltkraft ≥ 0.7 N
release force

Differenzweg ≤ 0.2 mm
movement differential

IP Schutzklasse nach EN 60529 IP 67
protection class acc to EN 60529 IP 67



G: Konform nach IEC 60335-1:2001 Kap. 30
G: matching IEC 60335-1:2001 clause 30

-		XXX						1045.0122-XX				
Figure		Type						Art.No.-PI				
General tolerances							Sheet 01			Ident. K	Document number 10450122	Index d
All dimensions are in millimetres		Shape and location  0.1	Angle ± 2 °	Edge tolerance  +0.25 +0.1 0 -0.25		Length						
					0-6	± 0.1	± 0.2					
					>6-15	± 0.15	± 0.3					
					>15-30	± 0.2	± 0.5					
					>30-70	± 0.3	± 10%					
					>70-120	± 0.4						
>120	± 0.8											
d	126682	2019-08-30		LEK		Format DIN A4			Projection 	Scale 2:1	Snap action switch	
c	83090	2013-03-11		BRC								
b	78489	2012-05-30		BRC		System NX V11.0			 MARQUARDT			
a	77237	2012-02-13		BRC								
Index	MEC-No.	Date (YYYY-MM-DD)		Edited by		Replacement of						