
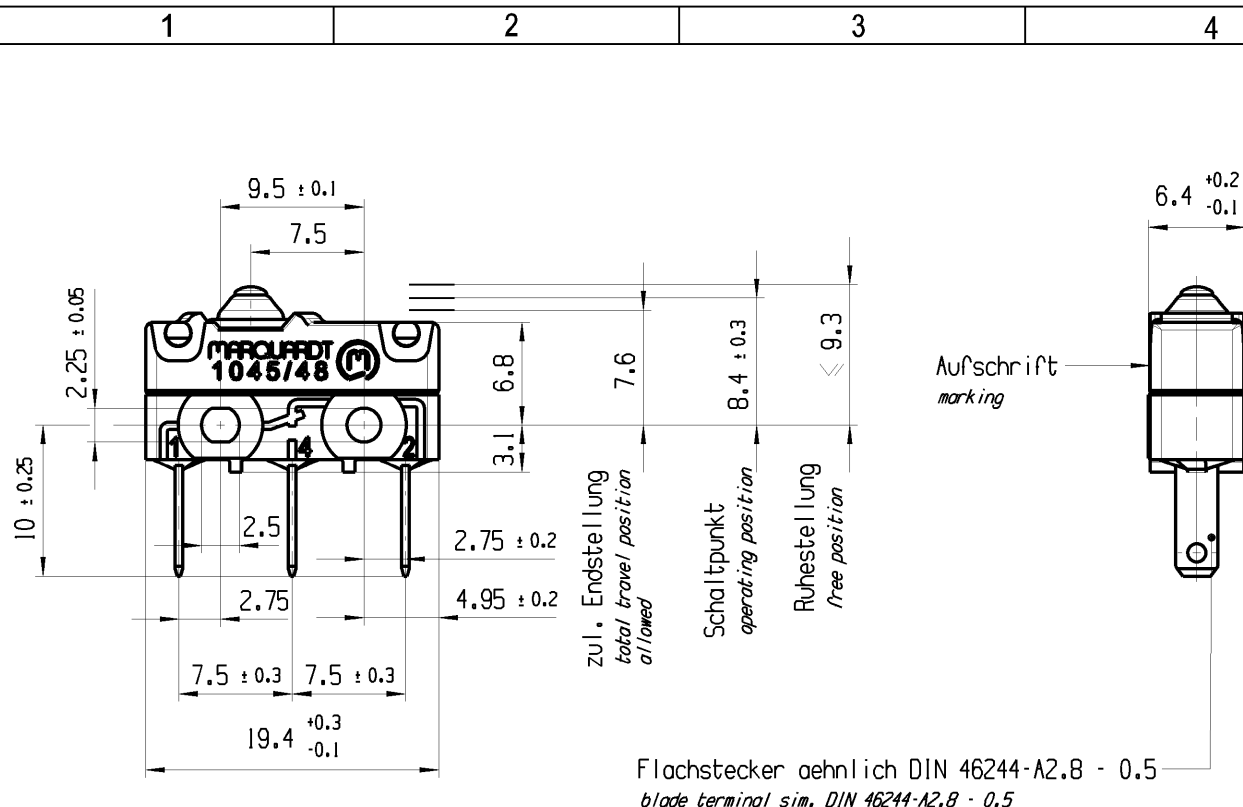



Aufschrift
Marking



Wechsler 1-polig
Kontakte vergoldet
single pole changeover
contacts gold plated

Schaltbetaetigungskraft
actuating force


Rueckschaltkraft
release force

Differenzweg
movement differential

≤ 1.9 N

≥ 0.5 N

≤ 0.2 mm




G: Konform nach IEC 60335-1:2001 Kap. 30
G: matching IEC 60335-1:2001 clause 30

IP Schutzklasse nach EN 60529
protection class acc to EN 60529

IP 67

1:1

-		XXX										1045.1151-XX					
Figure		Type										Art.No.-PI					
General tolerances												Sheet 01			Ident. K	Document number 10451151	Index d
All dimensions are in millimetres		Shape and location  0.1	Angle ± 2 °	Edge tolerance 		Length	Radii	Format DIN A4	Projection 	Scale 2:1							
					0-6	± 0.1	± 0.2										
					>6-15	± 0.15	± 0.3										
					>15-30	± 0.2	± 0.5										
					>30-70	± 0.3	± 10%										
					>70-120	± 0.4											
					>120	± 0.8											
d	126682	2019-08-30		LEK		System NX V11.0			Snap action switch								
c	83090	2013-03-11		BRC													
b	78489	2012-04-26		BRC		Replacement of			 MARQUARDT								
a	77237	2012-02-13		BRC													
Index	MEC-No.	Date (YYYY-MM-DD)		Edited by													