

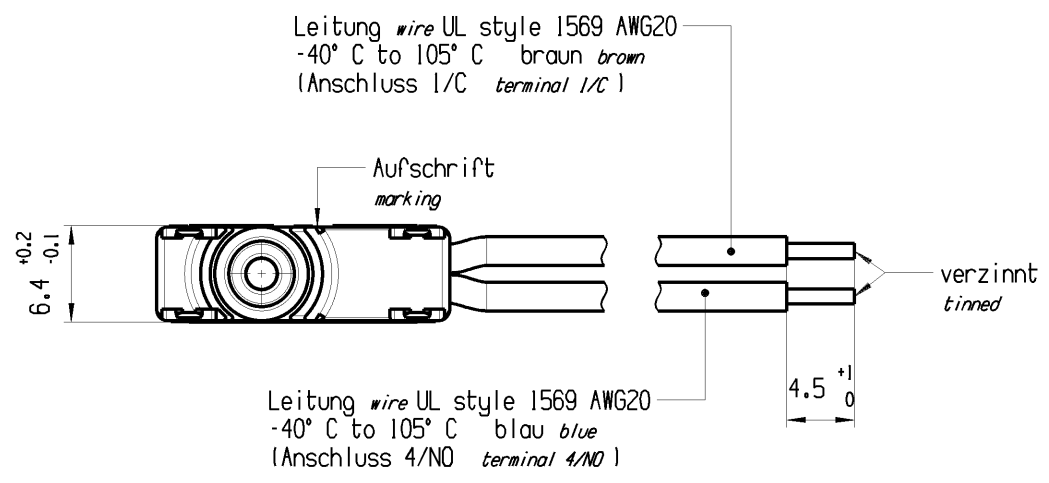


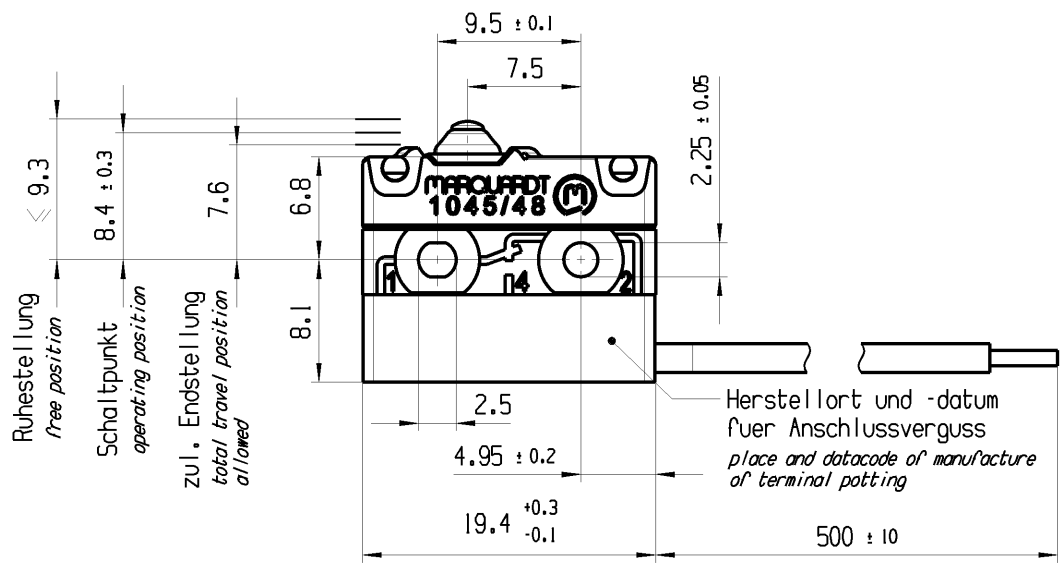

Schliesser 1-polig
single pole normally open

Schaltbetaetigungskraft
actuating force ≤ 2.6 N

Rueckschaltkraft
release force ≥ 0.7 N

Differenzweg
movement differential ≤ 0.2 mm

IP Schutzklasse nach EN 60529
protection class acc to EN 60529 IP 67

G: Konform nach IEC 60335-1:2001 Kap. 30
G: matching IEC 60335-1:2001 clause 30

fuer Form und Lage FOR SHAPE AND LOC.		⊙ =	0.1	Allgemeintoleranzen UNTOLERANCED DIMENSIONS					Pause COPY	Blatt SHEET 01		TYP K	Zeichn./DRAWING NO. 10481132	Index b
fuer Winkel FOR ANGLE ± 2				PROJEKTION 	Abmasse und Nennmassbereiche Angaben in mm ALL DIMENSIONS ARE IN MILLIMETRES		Laenge LENGTH	Radien RADII		Original Din A4	Masstab SCALE 2:1 30mm			
						0-6	± 0.1	± 0.2						
						>6-15	± 0.15	± 0.3						
						>15-30	± 0.2	± 0.5						
						>30-70	± 0.3							
						>70-120	± 0.4	± 10%						
						>120	± 0.8							
									0 10 20 30mm		SCHNAPPSCHALTER snap action switch			
									CAD: NX V10.0					
b		101720	06.04.16	BRC					gez./DRAWN BY 30.07.12 BRC		 MARQUARDT			
a		80327	14.03.13	BRC					gepr./CHECKED BY					
		79871	05.09.12	BRC					Ersatz fuer/REPLACEMENT OF					
Ausg. ISSUE		Aenderung REVISION		gez. DRAWN BY	Ausg. ISSUE	Aenderung REVISION		gez. DRAWN BY						