


1	2	3	4
Empfohlener Ausschnitt fuer Rastbefestigung (Graf gegenueber Bestueckungsseite) recommended cut-out for snap-fixing (ledge opposite to snap-in direction)	Wanddicke wall thickness 0.8 bis/to 5.0	Ausschnittlaenge length of cut-out 27.2 ± 0.1	Ausschnittbreite width of cut-out 12.2 ^{0..2}



Aufschrift
Marking

155..
16(4)/250 ~ T100/55 T100
10(4)/250 ~ 5E4
5/100A 250V ~

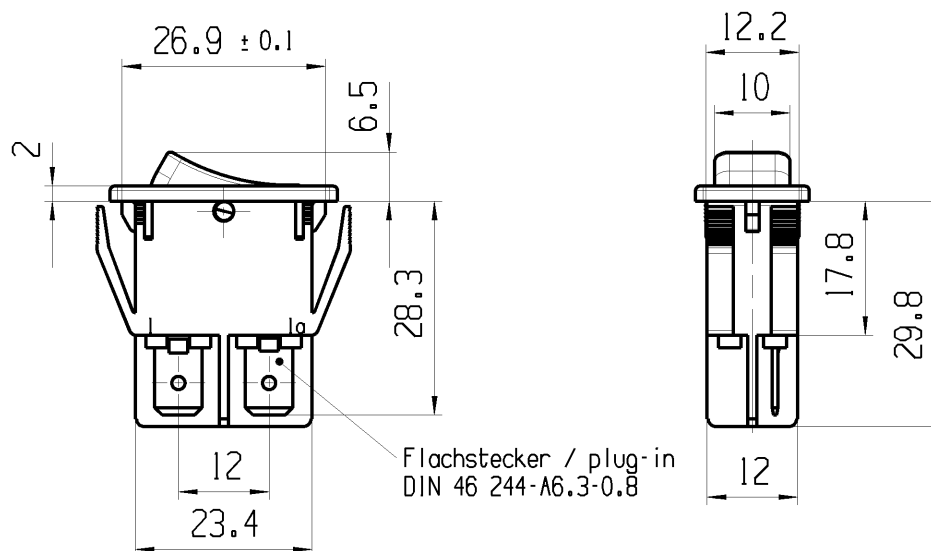


16A 125-250V AC
1 HP 125V AC
2 HP 250V AC
R38

Ausschalter 1-polig
Fuer Geraete der Klasse II geeignet

SPST
suitable for appliances of class II

Herstellort/-jahr/-woche
nach DIN EN 60062
code of manufacture:
place/year/week
acc. to DIN EN 60062
Auf Verpackung/on box: G

G=Konform nach IEC 60335-1: 2001 Kap.30
G=matching IEC 60335-1: 2001 clause 30

Fuer Form und Lage FOR SHAPE AND LOC.		☉ =	Allgemeintoleranzen UNTOLERANCED DIMENSIONS						Pause COPY	Blatt SHEET 01	TYP K	Zeichn./DRAWING NO. 15513102	Index 9	
			PROJEKTION	Abmasse und Nennmassbereiche Angaben in mm		ALL DIMENSIONS ARE IN MILLIMETRES		Laenge LENGTH						Radien RADI
0-6	± 0.2	± 0.2												
>6-15	± 0.4	± 0.4												
>15-30	± 0.4	± 0.4												
>30-70	±	±												
>70-120	±													
>120-200	±													
Fuer Winkel FOR ANGLE. ±									0 10 20 30mm		GERAETESCHALTER Appliance Switch			
									CAD: NX V6.0					
d	35129		26.02.03	WJ					gez./DRAWN BY 18.12.06 BRC gepr./CHECKED BY				 MARQUARDT	
c	23635		09.11.95	RS	g	69572	17.08.10	HHE						
b	21323		22.04.92	MUT	r	50244	23.01.07	BRC						
a	18448	09.02.88	ZF	e	47793	13.07.06	HHE	Ersatz fuer/REPLACEMENT OF Zg.gl.Nr.v.21.04.92						
Ausg. ISSUE	Aenderung REVISION	gez. DRAWN BY	Ausg. ISSUE	Aenderung REVISION	gez. DRAWN BY									