





A

B

C

D

E

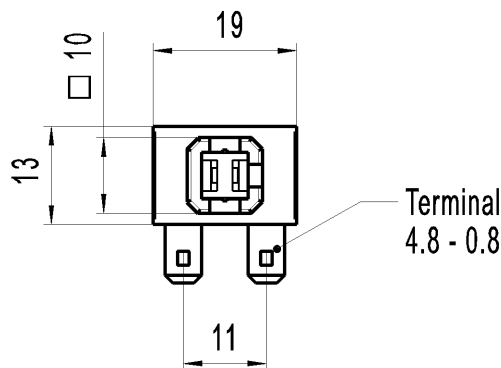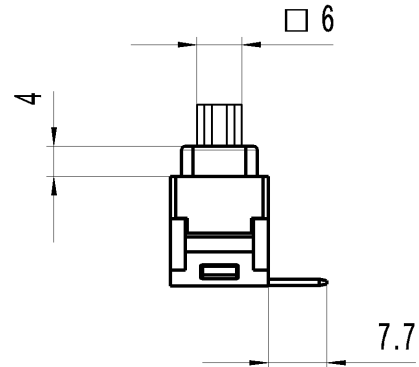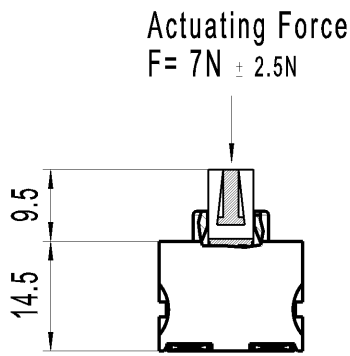

Marking




168..
12(8) / 250~ T100/55
10(8) / 250~ 5E4



12A 125-250 VAC
1/2 HP 125-250 VAC
R97



Code of manufacture: place/year/week



Operating Position	h
OFF	24.0
ON	21.3
Block	19.7

SPST

Suitable for appliances of class II

Actuator designed for use with external cap.
This cap must be used to ensure that
no additional force is applied to the switch base
during the entire stroke.

-		-					-		1681.3701-XX			
Figure		Type					Customer No.		Art.No.-PI			
General tolerances							Sheet 01			Ident. K	Document number 16813701	Index e
All dimensions are in millimetres		Shape and location ⊙ = 0.1	Angle ± 2 °	Edge tolerance +0.25 +0.1 0 -0.25		Length						
					0-6	± 0.1	± 0.2					
					>6-15	± 0.15	± 0.3					
					>15-30	± 0.2	± 0.5					
					>30-70	± 0.3	± 10%					
					>70-120	± 0.4						
					>120	± 0.8						
e	129820	2019-11-27		HHE			Format DIN A4	Projection 	Scale 1:1	Appliance Switch		
d	34660	2002-09-11		HHE								
c	23951	1996-04-09		RS								
b	23240	1995-03-09		SB								
Index	MEC-No.	Date (YYYY-MM-DD)		Edited by			System NX V11.0			 MARQUARDT		
							Replacement of Zg.gl.Nr.v.10.05.1994					