

©





A

B

C

D

E

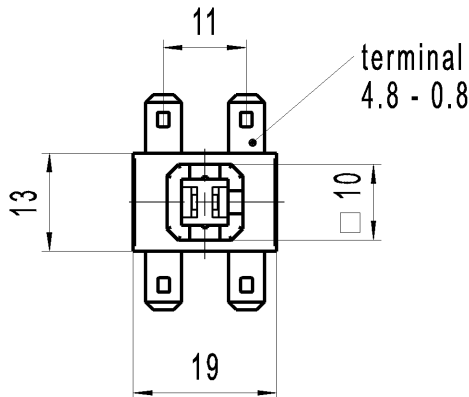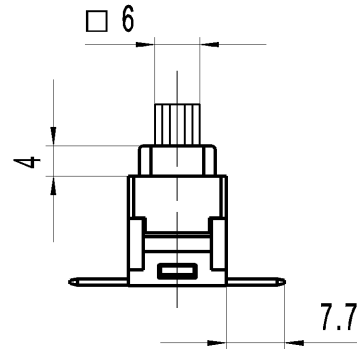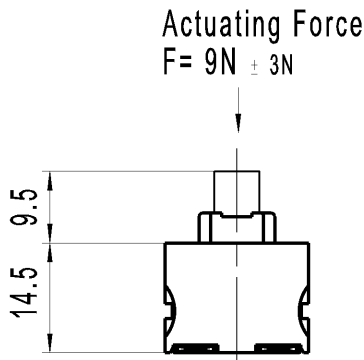

Marking



168..
12(8) / 250~ T100/55
10(8) / 250~ 5E4



12A 125-250 VAC
1/2 HP 125-250 VAC
R97  

Code of manufacture: place/year/week

On Box: G

DPST

Suitable for appliances of class II

Actuator designed for use with external cap.
This cap must be used to ensure that
no additional force is applied to the switch base
during the entire stroke.

G = matching IEC 60335-1:2001 clause 30

Operating Position	h
OFF	24.0
ON	21.3
Block	19.7

-	-						-			1682.3702-XX		
Figure	Type						Customer No.			Art.No.-PI		
General tolerances							Sheet 01			Ident. K	Document number 16823702	Index a
All dimensions are in millimetres	Shape and location 	Angle $\pm 2^\circ$	Edge tolerance 		Length	Radii						
				0-6	± 0.2	± 0.2						
				>6-15	± 0.4	± 0.3						
				>15-30	± 0.4	± 0.5						
				>30-70	$\pm$	$\pm 10\%$						
				>70-120	$\pm$							
>120	$\pm$											
							Format DIN A4	Projection 	Scale 1:1	Appliance Switch		
							System NX V11.0					
a	129820	2019-11-26		HHE			Replacement of Zg.gl.Nr.v.23.01.2007					
	49824	2007-01-23		HHE								
Index	MEC-No.	Date (YYYY-MM-DD)		Edited by								