



1		2		3		4	
A	Empfohlener Ausschnitt fuer Rastbefestigung (Grat gegenueber Bestueckungsseite) recommended cut-out for snap-in fixing (ledge opposite to snap-in direction)	Wanddicke wall thickness		Ausschnittlaenge length of cut-out		Ausschnittbreite width of cut-out	
		0.75	bis / to 1.25	19.2	-0.1	12.9	+0.1
		1.25	bis / to 2	19.4	-0.1	12.9	+0.1
		2	bis / to 3	19.8	-0.1	12.9	+0.1

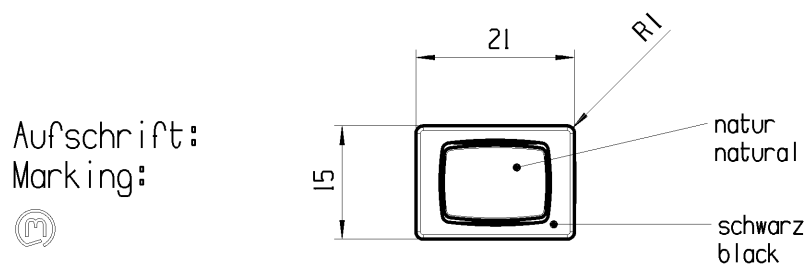


Aufschrift:
Marking:

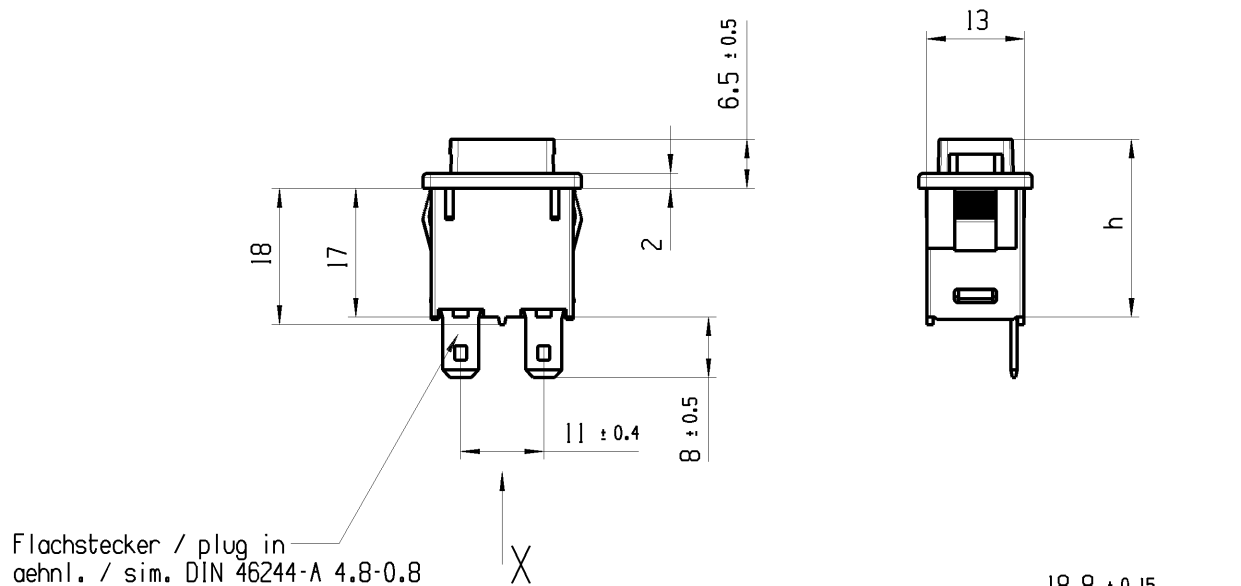

168..
16141/250 ~
12181/250 ~
10181/250 ~ 5E4
T100/55
05

12A 125-250V AC
1/2 HP 125-250V AC
R97




Herstellort/-jahr/-woche
code of manufacture:
place / year / week

Schalt- stellung	operating position	h
AUS	OFF	23.5
EIN	ON	≤ 20.45
Block	block	19.3

Schliesser 1-polig
Fuer Geraete der Klasse II geeignet

SPNO
suitable for appliances of class II

General tolerances							Sheet 01			Ident.	Document number	Index
All dimensions are in millimetres	Shape and location ⊙ ≡	Angle ± 2 °	Edge tolerance 		Length	Radii	Format DIN	Projection 	Scale 1 : 1	K	16831802	a
				0-6	± 0.15	± 0.2						
				>6-15	± 0.2	± 0.3						
				>15-30	± 0.25	± 0.5						
				>30-70	± 0.4	± 10%						
				>70-120	± 0.6							
>120	± 1.0											
							A4			appliance Switch		
							System NX V8.5			 MARQUARDT		
a	114796	2018-02-16	HHE	Replacement of 1683.V05.029								
	52390	2007-05-04	HHE									
Index	ECN-No.	Date (YYYY-MM-DD)	Edited by									