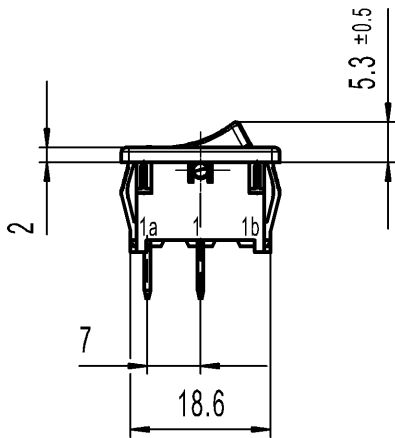
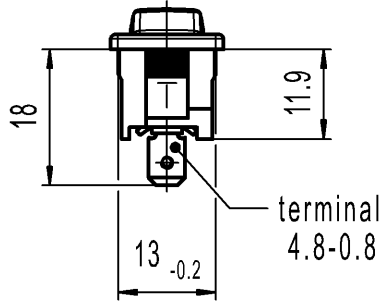
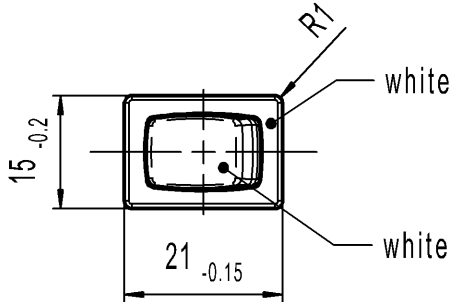



A	1	2	3	4
	recommended cut-out for snap-in fixing (edge opposite to snap-in direction)	wall thickness	length of cut-out	width of cut-out
		0.75 to 1.25	19.2 -0.1	12.9+0.1
		1.25 to 2	19.4 -0.1	12.9+0.1
		2 to 3	19.8 -0.1	12.9+0.1
B				
				
C				
D	Marking Ⓜ 18.. 6(4)/250~5E4 10(4)/250~ 5/50A 250~ T100/55 SPST Suitable for appliances of class II			
E	6A 125-250V AC 1/4 HP 125V AC 1/2 HP 250V AC R 30 Code of manufacture: place/year/week 			

-	-	-	1801.1101-XX
Figure	Type	Customer Part No.	Art.No.-PI
Shape and location 	Angle ± 2 °	Sheet 01	
	Edge tolerance	Ident.	Document number
		K	18011101
		Appliance Switch	
h	137838	2021-08-13	JOSHIO
g	43724	2005-07-19	vor
f	25088	1997-06-24	SIG
Index	MEC-No.	Date (YYYY-MM-DD)	Edited by
		System NX V1872	Replacement of
		Zg.gl.Nr.v.23.06.1997	
		 MARQUARDT	