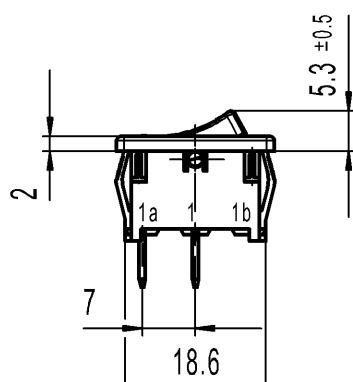
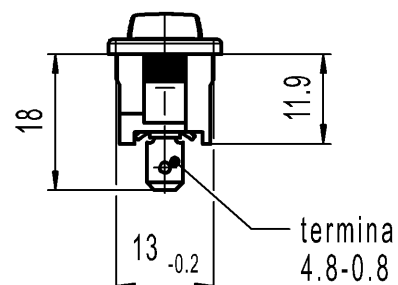
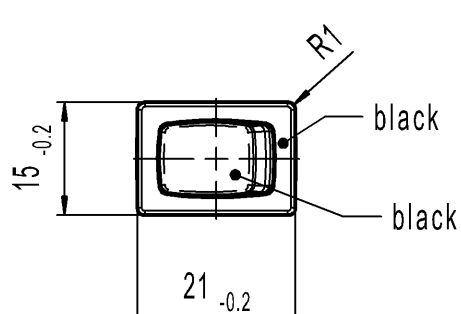




	1	2		3		4
A	recommended cut-out for snap-in fixing (edge opposite to snap-in direction)		wall thickness	length of cut-out	width of cut-out	
			0.75 to 1.25	19.2-0.1	12.9+0.1	
			1.25 to 2	19.4-0.1	12.9+0.1	
			2 to 3	19.8-0.1	12.9+0.1	
B						
C						
D	Marking Ⓜ 18.. 8(8)/250~ 5E4 12(4) /250~ T100/55 5/70 A 250V~ 		SPST Suitable for appliances of class II			
E	15A 125-250V AC 3/4 HP 125V AC 1 1/2 HP 250V AC R 149 					
Code of manufacture: place/year/week						

-	-	-	1801.1121-XX
Figure	Type	Customer Part No.	Art.No.-PI
Shape and location 	Angle $\pm 2^\circ$	Sheet 01 Ident. K Document number 18011121 Index c	
	Edge tolerance		
	Length	Format DIN A4 Projection  Scale 1:1 All dimensions are in millimetres	
	Radii		
c	137838	2021-05-28	JOSHIO
b	43724	2005-07-19	vor
a	25089	1997-06-27	SIG
	17678	1986-12-10	ZF
Index	MEC-No.	Date (YYYY-MM-DD)	Edited by
		System NX V1872	Replacement of
		Zg.gl.Nr.v.27.06.1997	
 MARQUARDT			