


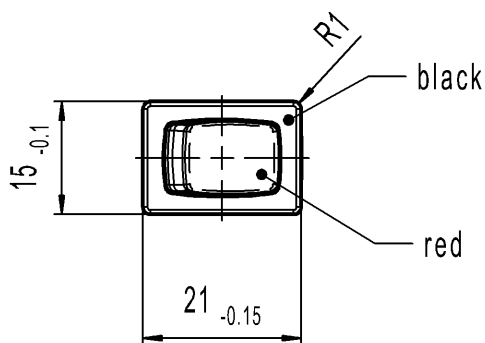


1	2	3	4
recommended cut-out for snap-in fixing (edge opposite to snap-in direction)	wall thickness	length of cut-out	width of cut-out
	0.75 to 1.25	19.2-0.1	12.9+0.1
	1.25 to 2	19.4-0.1	12.9+0.1
	2 to 3	19.8-0.1	12.9+0.1

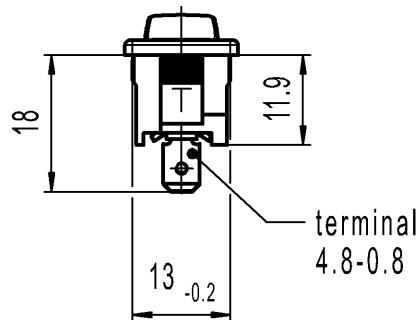

Marking


1801.
4(2)/250 ~ T100/55

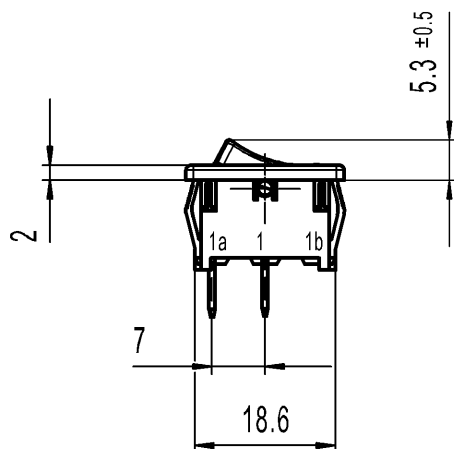

6A 125V AC
4A 250V AC
1/10HP 125-250V AC
R52

Code of manufacture: place/year/week

SPNC
Suitable for appliances of class II



-		-						-		1801.1303-XX				
Figure		Type						Customer Part No.		Art.No.-PI				
Shape and location 		Angle ± 2 °		Length			Radii		Sheet 01			Ident. K	Document number 18011303	Index a
									Format DIN A4	Projection 	Scale 1:1			
		0-6	± 0.2		±		± 0.2	All dimensions are in millimetres						
		>6-15	± 0.4		±		±							
		>15-30	± 0.4		±		±							
		>30-70	±		±		±							
		>70-120	±		±		±							
		>120-200	±		±		±							
			±		±		±							
			±		±		±							
								System NX V1872			Appliance Switch			
a		137838		2021-08-12		MOHITEN		Replacement of Zg.gl.Nr.v.14.09.2005			 MARQUARDT			
Index		MEC-No.		Date (YYYY-MM-DD)		Edited by								