


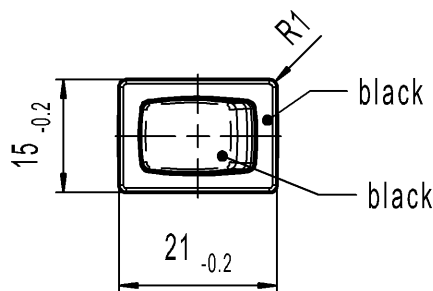
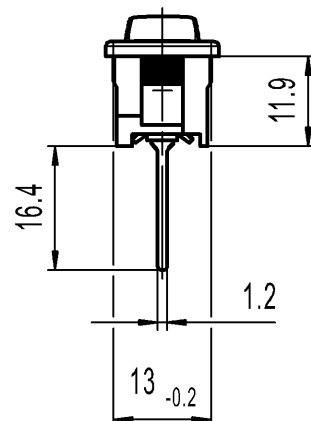


1	2	3	4
Recommended terminal layout, side of component, tolerances as per DIN IEC 326 item 3 very fine	recommended cut-out for snap-in fixing (edge opposite to snap-in direction)		
	wall thickness	length of cut-out	width of cut-out
	0.75 to 1.25 1.25 to 2 2 to 3	19.2 -0.1 19.4 -0.1 19.8 -0.1	12.9+0.1 12.9+0.1 12.9+0.1

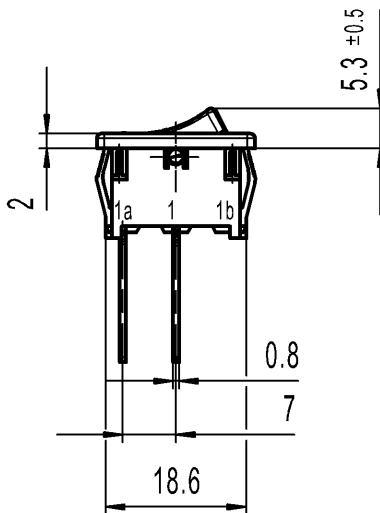

SPST
Suitable for appliances of class II

Marking

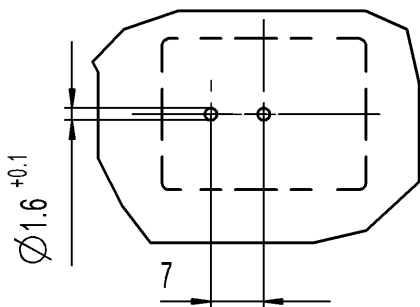


18..
6(4)/250~ 5E4
10(4)/250~ T100/55
5/50A 250V~



6A 125-250V AC
1/4 HP 125V AC
1/2 HP 250V AC
R30

Code of manufacture: place/year/week



-	-	-	1801.2702-XX
Figure	Type	Customer Part No.	Art.No.-PI
Shape and location ⊙ ≡	Angle ± 2 °	Sheet 01	
	Edge tolerance	Ident. K	Document number 18012702
	Length	Index b	Appliance Switch
	Radii	All dimensions are in millimetres	
b 137838		System NX V1872	MARQUARDT
a 43724		Replacement of	
28877		Zg.gl.Nr.v.23.12.1999	
Index	MEC-No.	Date (YYYY-MM-DD)	