

recommended cut-out for snap-in fixing
(edge opposite to snap-in direction)

wall thickness

length of cut-out

width of cut-out

0.75 to 1.25

19.2-0.1

12.9+0.1

1.25 to 2





19.4-0.1

12.9+0.1

2 to 3

19.8-0.1

12.9+0.1

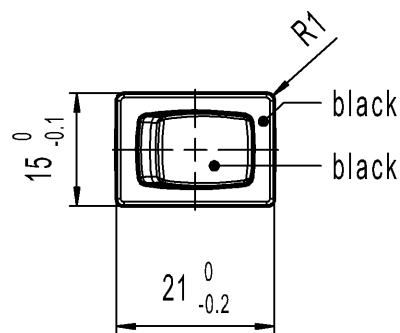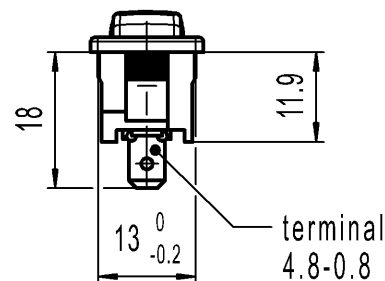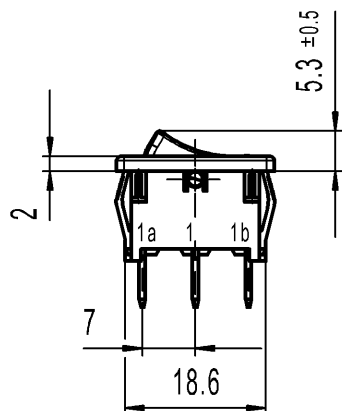


Single pole changeover
Contacts gold plated

Marking



1803.
30mA 12V 5E4
T100/55

Code of manufacture: place/year/week



-	-	-	1803.1252-XX
Figure	Type	Customer Part No.	Art.No.-PI
Shape and location 	Angle $\pm 2^\circ$ Edge tolerance 	Sheet 01	
		Ident.	Document number
		K	18031252
		Appliance Switch	
		MARQUARDT	
		Format DIN	Projection
		A4	1:1
		Scale	1:1
		All dimensions are in millimetres	
		System NX V1872	
e	137892	JOSHIO	
d	66315	MUT	
c	64510	MUT	
b	31445	SIG	
Index	MEC-No.	Date (YYYY-MM-DD)	Edited by