
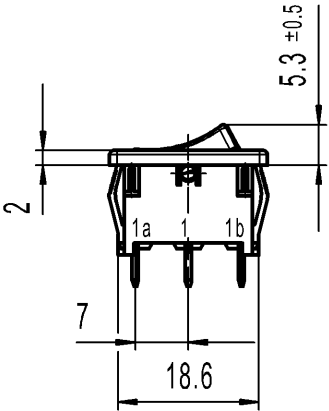

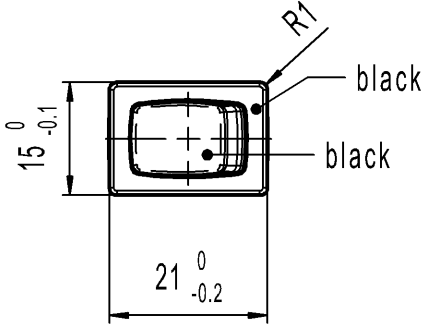




	1	2	3	4	
A	recommended cut-out for snap-in fixing (edge opposite to snap-in direction)		wall thickness	length of cut-out	width of cut-out
			0.75 to 1.25	19.2-0.1	12.9+0.1
			1.25 to 2	19.4-0.1	12.9+0.1
			2 to 3	19.8-0.1	12.9+0.1
B					
			solder terminal 2.6x1.6		
C					
D	Marking 1803. 6(4)/250~5E4 10(4)250~ T100/55 		 SPDT Suitable for appliances of class II		
E	6A 125-250V AC 1/4HP 125V AC 1/2HP 250V AC R30  Code of manufacture: place/year/week				

Marking



1803.

6(4)/250~5E4

10(4)250~ T100/55







6A 125-250V AC

1/4HP 125V AC

1/2HP 250V AC


R30

Code of manufacture: place/year/week

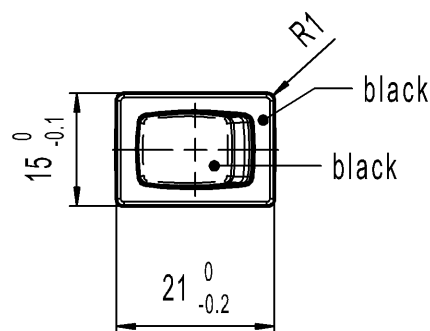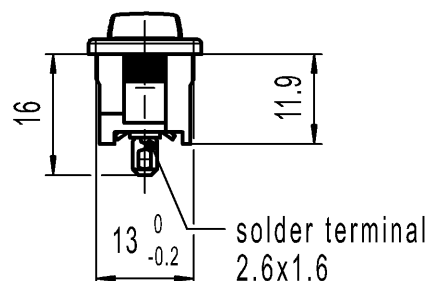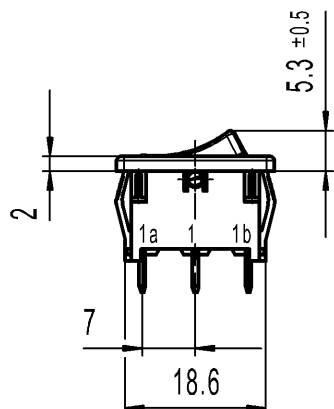

SPDT

Suitable for appliances of class II



-	-	-	1803.6102-XX
Figure	Type	Customer Part No.	Art.No.-PI
Shape and location 	Angle ± 2 °	Sheet 01	
	Edge tolerance		
	Length	Ident.	Document number
	Radii	K	18036102
		Index	d
		Appliance Switch	
d	137892	2021-06-07	JOSHIO
c	66315	2009-11-30	MUT
b	64510	2009-10-01	MUT
a	29280	2000-05-17	SIG
Index	MEC-No.	Date (YYYY-MM-DD)	Edited by
		System NX V1872	Replacement of
		Zg.gl.Nr.v.17.05.2000	
		MARQUARDT	