
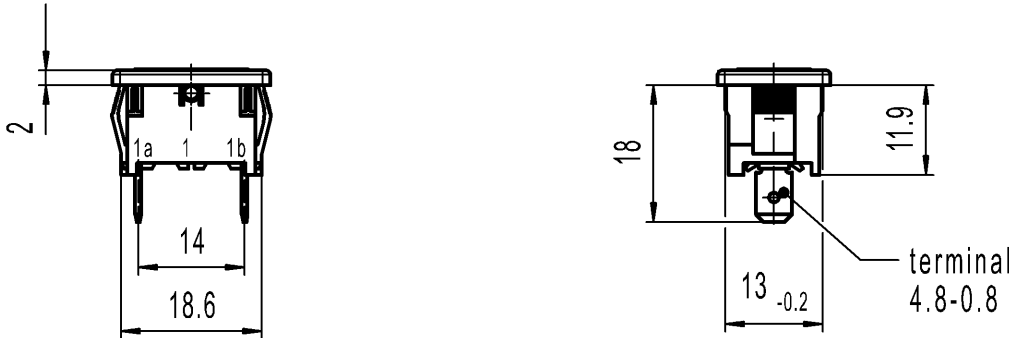
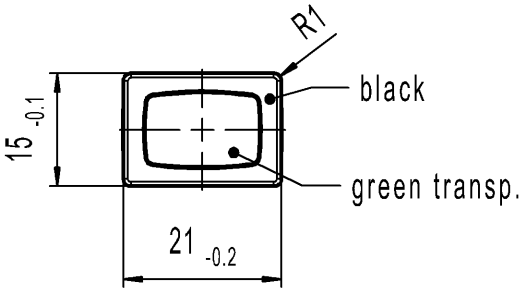



A	1	2	3	4
	recommended cut-out for snap-in fixing (edge opposite to snap-in direction)	wall thickness	length of cut-out	width of cut-out
		0.75 to 1.25	19.2-0.1	12.9+0.1
		1.25 to 2	19.4-0.1	12.9+0.1
B		2 to 3	19.8-0.1	12.9+0.1
C				
				
D				
	Pilot Light Neon lamp with Rv for 230V AC Suitable for appliances of class II The light source of this recessed signal light is non-replaceable; Once the light source has reached the end of it's lifespan, the entire recessed signal light must be replaced.			
E	Marking 1807. 230V AC T85 IP40 230V AC 			
	Code of manufacture: place/year/week			



-	-	-	1807.1108-XX
Figure	Type	Customer Part No.	Art.No.-PI
Shape and location 	Angle $\pm 2^\circ$	Sheet 01	
	Edge tolerance	Ident. Document number Index	
		K 18071108 g	
		Pilot Light	
Length 0-6 ± 0.2 >6-15 ± 0.4 >15-30 ± 0.4		Radii ± 0.2 $\pm$ $\pm$ $\pm$ $\pm$ $\pm$ $\pm$	
g 158929 2025-10-08 HHE f 137893 2021-06-07 JOSHIO e 64492 2009-10-14 MUT d 47974 2006-06-26 VOR		All dimensions are in millimetres System NX V2306 Replacement of Zg.gl.Nr.v.24.02.1994	
Index MEC-No. Date (YYYY-MM-DD)		Edited by MARQUARDT	