

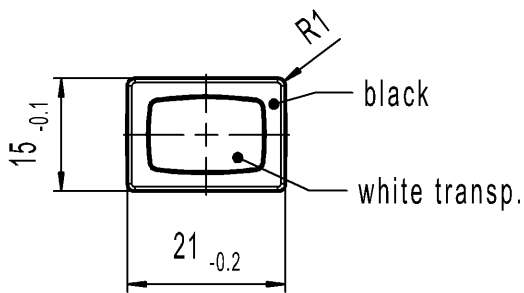
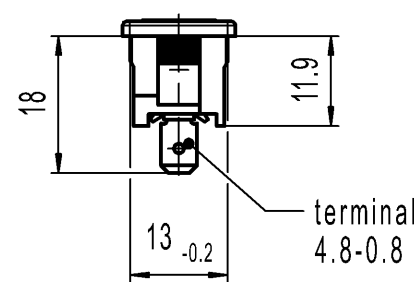


A	1	2	3	4
	recommended cut-out for snap-in fixing (edge opposite to snap-in direction)	wall thickness	length of cut-out	width of cut-out
		0.75 to 1.25	19.2-0.1	12.9+0.1
		1.25 to 2	19.4-0.1	12.9+0.1
B			2 to 3	19.8-0.1
				12.9+0.1
C				
D				
E				




Marking

 1807.
 230V AC T85
 IP40

Pilot Light
 Neon lamp with Rv for 230V AC
 Suitable for appliances of class II

The light source of this recessed
 signal light is non-replaceable;
 Once the light source has reached
 the end of it's lifespan, the entire
 recessed signal light must be replaced.



Code of manufacture: place/year/week

-	-	-	1807.1126-XX
Figure	Type	Customer Part No.	Art.No.-PI
Shape and location 	Angle $\pm 2^\circ$	Sheet 01	
	Edge tolerance	Ident. K	Document number 18071126
		Projection 	Index d
		Scale 1:1	
		All dimensions are in millimetres	
d	158929	2025-10-08	HHE
c	137893	2021-06-07	JOSHIO
b	64492	2009-10-14	MUT
a	47974	2006-06-26	VOR
Index	MEC-No.	Date (YYYY-MM-DD)	Edited by
		System NX V2306	Replacement of
		Zg.gl.Nr.v.05.05.1999	
 MARQUARDT			