


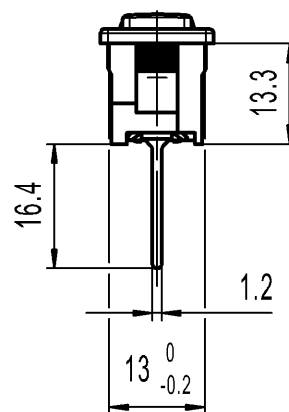
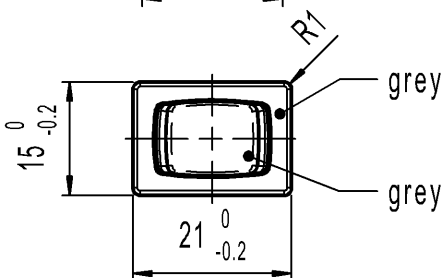
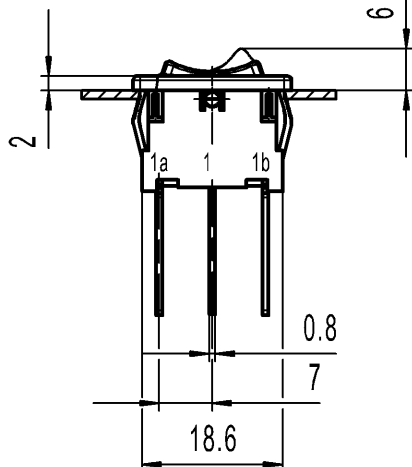


1	2	3	4
tolerances as per DIN IEC 326 item 3 very fine recommended terminal layout; side of component;		recommended cut-out for snap-in fixing (edge opposite to snap-in direction)	
		wall thickness	length of cut-out
		0.75 to 1.25	19.2 -0.1
		1.25 to 2	19.4 -0.1
		2 to 3	19.8 -0.1
		width of cut-out	
		12.9+0.1	
		12.9+0.1	
		12.9+0.1	

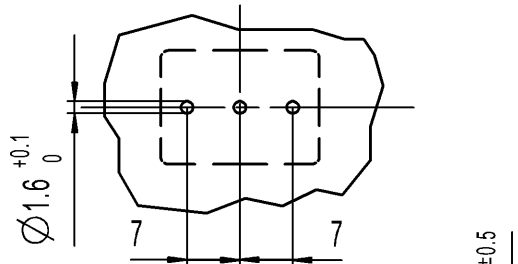

SPDT
With centre-off
Suitable for appliances of class II



Marking
1808. μ
6(2)/250~T100/55

6A 125-250V AC
1/8HP
R58

Code of manufacture: place/year/week

-	-	-	1808.2704-XX
Figure	Type	Customer Part No.	Item-PI
Shape and location 		Sheet 01	Ident. Document number Index
		Format DIN A4 Projection Scale 1:1	K 18082704 c
		All dimensions are in millimetres	Appliance Switch
c	137894	2021-06-09	JOSHIO
b	64492	2009-10-20	MUT
a	29392	2000-05-04	SIG
	27788	1999-06-22	VOR
Index	MEC-No.	Date (YYYY-MM-DD)	Edited by
		System NX V1872	Replacement of
		Zg.gl.Nr.v.20.05.1999	
		MARQUARDT	