

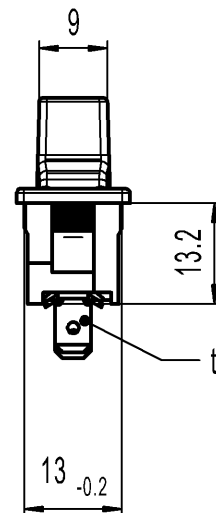
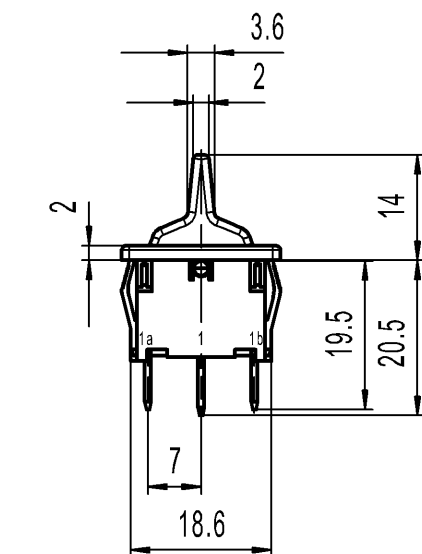


A	1	2	3	4
	recommended cut-out for snap-in fixing (edge opposite to snap-in direction)	wall thickness	length of cut-out	width of cut-out
		0.75 to 1.25	19.2 ^{-0.1}	12.9 ^{+0.1}
		1.25 to 2	19.4 ^{-0.1}	12.9 ^{+0.1}
	2 to 3	19.8 ^{-0.1}	12.9 ^{+0.1}	



- terminal 4.8-0.8

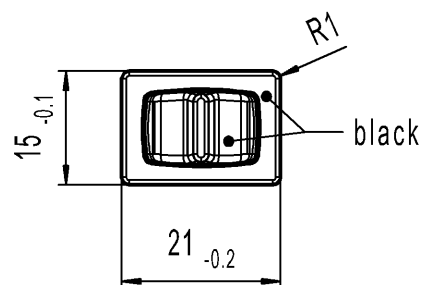

SPDT

With centre-off

Suitable for appliances of class II


Marking




1818. μ 6A 125-250V AC
6(2)/250 ~ T100/55 1/8HP



Code of manufacture: place/year/week



-		-						-			1818.1102-XX				
Figure		Type						Customer Part No.			Art.No.-PI				
Shape and location 		Angle ± 2 ° Edge tolerance 		Length				Radii		Sheet 01			Ident. K	Document number 18181102	Index e
				0-6	± 0.2		±	0-6	± 0.2	Format DIN A4	Projection 	Scale 1:1			
				>6-15	± 0.4		±		±						
				>15-30	± 0.4		±		±						
					±		±		±						
					±		±		±						
					±		±		±						
					±		±		±						
					±		±		±						
				e		138576		2021-09-09		MUT		All dimensions are in millimetres			Appliance Switch
d		64505		2010-01-26		MUT									
c		29866		2000-06-19		BMI									
b		29866		2000-06-19		BMI									
Index		MEC-No.		Date (YYYY-MM-DD)		Edited by		System NX V1872			 MARQUARDT				
								Replacement of Zg.gl.Nr.v.04.07.2000							