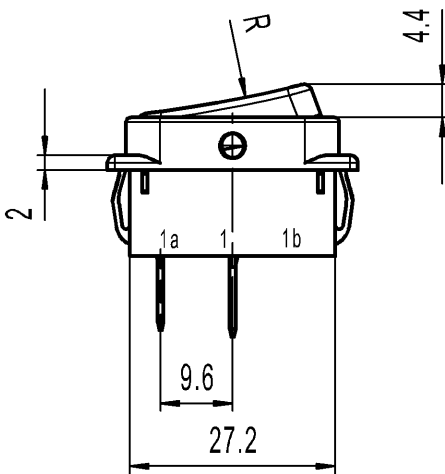
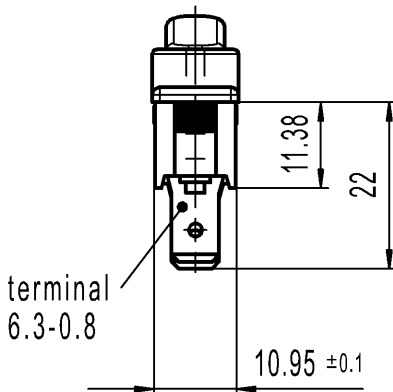
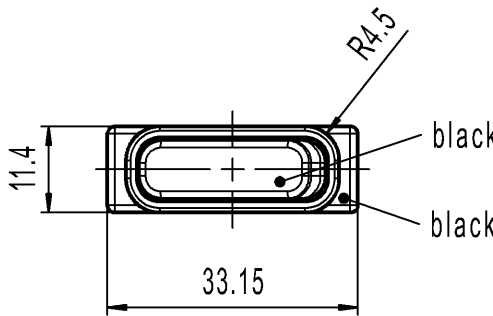



	1	2	3	4	
A	recommended cut-out for snap-in fixing (edge opposite to snap-in direction)		wall thickness	length of cut-out	width of cut-out
			0.75 to 1.25	30.0 -0.1	11 +0.1
			1.25 to 2	30.2 -0.1	11 +0.1
		2 to 3	30.6 -0.1	11 +0.1	
B					
C					
D					
E	Marking: 1831. 10(8)/250~5E4 20(4)/250~ T105/55 5/120A 250V~  16A 125-250V AC 1/3HP 125V AC 1 HP 250V AC R11   Code of manufacture: place/year/week On box: Geräteschalter Customer Part No. see variant table SPST Suitable for appliances of class II 				

-		-				14991		1831.8112-XX				
Figure		Type				Customer Part No.		Art.No.-PI				
Shape and location 		Angle $\pm 2^\circ$		Length		Radii		Sheet 01		Ident. K	Document number 18318112	Index d
				Edge tolerance								
		0-6	± 0.2		$\pm$	0-6	± 0.2	All dimensions are in millimetres				
		>6-30	± 0.4		$\pm$	>6-30	± 0.4					
		>30	± 0.6		$\pm$	>30	± 0.6					
			$\pm$		$\pm$		$\pm$					
			$\pm$		$\pm$		$\pm$					
			$\pm$		$\pm$		$\pm$					
			$\pm$		$\pm$		$\pm$					
			$\pm$		$\pm$		$\pm$					
d	138244	2021-08-06		MATHPATIR		System NX V1872		Appliance Switch  MARQUARDT				
c	46904	2006-03-30		hhe								
b	26421	1998-08-04		GRH								
a	23781	1996-02-05		GRH								
Index	MEC-No.	Date (YYYY-MM-DD)		Edited by		Replacement of Zg.gl.Nr.v.05.02.1996						