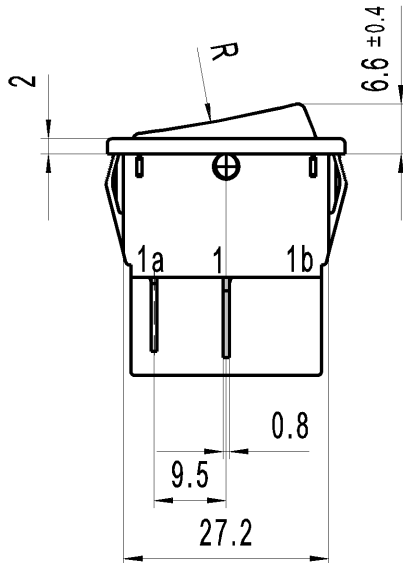
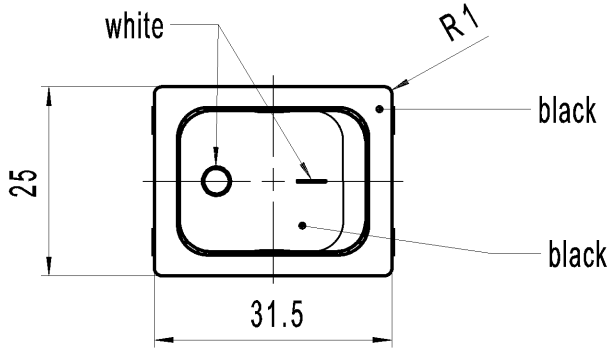



A	1	2	3	4
	Recommended cut-out for snap-in fixing (edge opposite to snap-in direction)	wall thickness 0.75 to 1.25 1.25 to 2 2 to 3	length of cut-out 30 -0.1 30.2 -0.1 30.6 -0.1	width of cut-out 22 +0.2 22 +0.2 22 +0.2
B				
C				
D	Marking 1832. 16(4)/250 ~ T105/55 05 16A 125-250V AC 1/4 HP 125V AC 1/2 HP 250V AC R70 Code of manufacture: place/year/week			
E	DPST Suitable for appliances of class II With integrated system cover 			

-	-	-	1832.0113-XX			
Figure	Type	Customer No.	Art.No.-PI			
General tolerances		Sheet 01	Ident. K	Document number 18320113	Index d	
All dimensions are in millimetres	Shape and location 					Angle ± 2 °
		0-6	± 0.2	± 0.2		
		>6-15	± 0.2	± 0.3		
		>15-30	± 0.4	± 0.5		
		>30-70	± 0.6			
		>70-120	±	± 10%		
>120	±					
d	120199	2018-10-08	HHE	Format DIN A4	Projection 	Scale 1:1
c	64507	2009-11-11	HHE			
b	39880	2004-03-15	HHE			
a	35777	2003-03-12	HHE			
Index	MEC-No.	Date (YYYY-MM-DD)	Edited by	System NX V11.0		Replacement of Zg.gl.Nr.v.10.07.2001
Appliance Switch						
MARQUARDT						