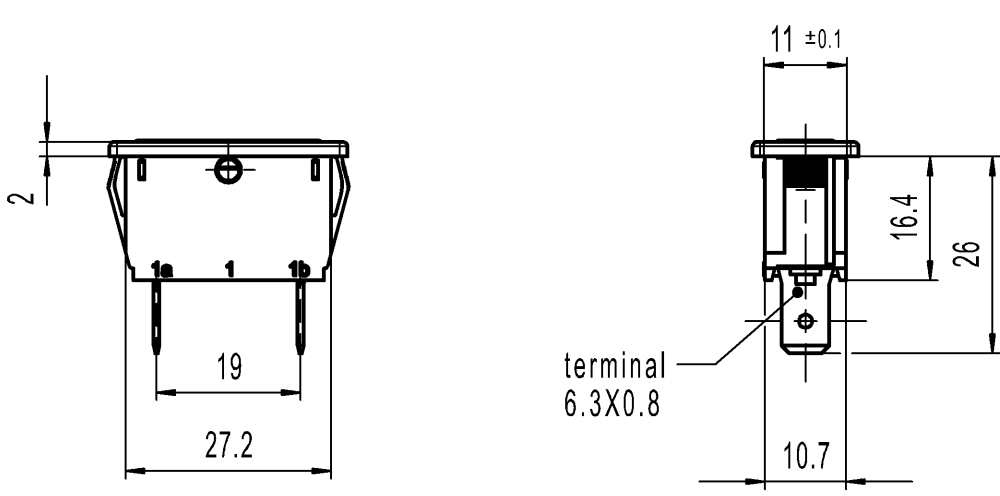
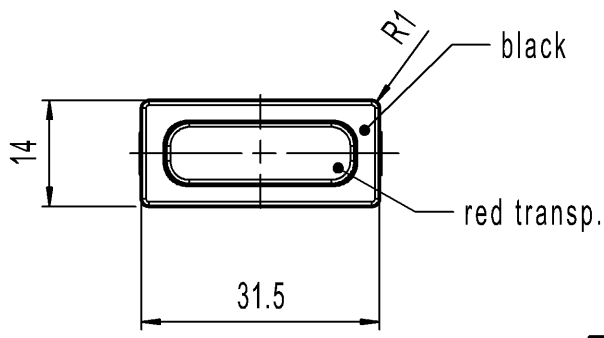





A	1	2	3	4
	recommended cut-out for snap-in fixing (edge opposite to snap-in direction)	wall thickness	length of cut-out	width of cut-out
		0.75 to 1.25	30 -0.1	11+0.1
		1.25 to 2	30.2 -0.1	11+0.1
		2 to 3	30.6 -0.1	11+0.1
B				
C				
D				
E	Marking 1837. 230V AC T100 IP40 Code of manufacture: place/year/week			
	Pilot Light Neon lamp with Rv for 230 V AC Suitable for appliances of class II The light source of this recessed signal light is non-replaceable; Once the light source has reached the end of it's lifespan, the entire recessed signal light must be replaced. 			

-	-	-	1837.3102-XX
Figure	Type	Customer Part No.	Art.No.-PI
Shape and location 	Angle $\pm 2^\circ$	Sheet 01	
	Edge tolerance	Ident.	Document number
	Length	K	18373102
	Radii	Index	d
	0-6	Format DIN	Scale
	>6-15	A4	1:1
	>15-30	All dimensions are in millimetres	
	>30-70	System NX V2306	
d	158929	2025-10-09	HHE
c	141194	2022-05-12	JOSHIO
b	69573	2010-07-28	HHE
a	22680	1994-02-25	GRH
Index	MEC-No.	Date (YYYY-MM-DD)	Edited by
Zg.gl.Nr.v.25.02.1994		 MARQUARDT	