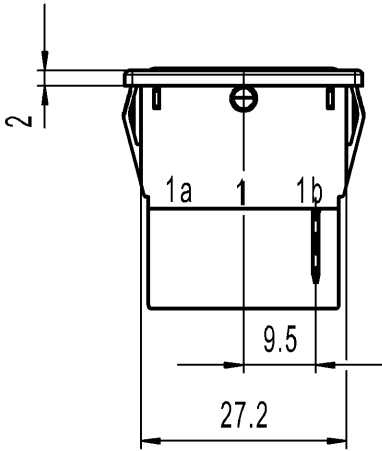
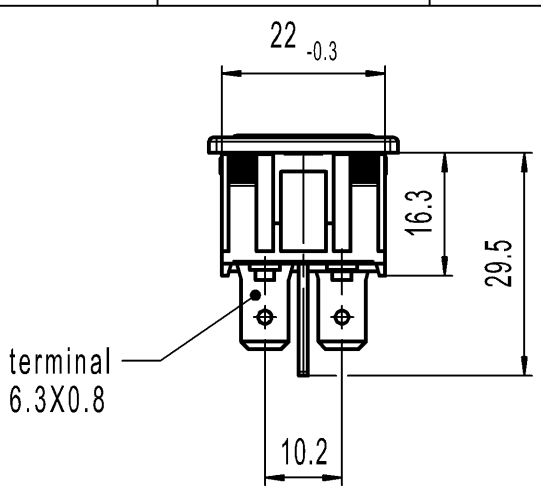
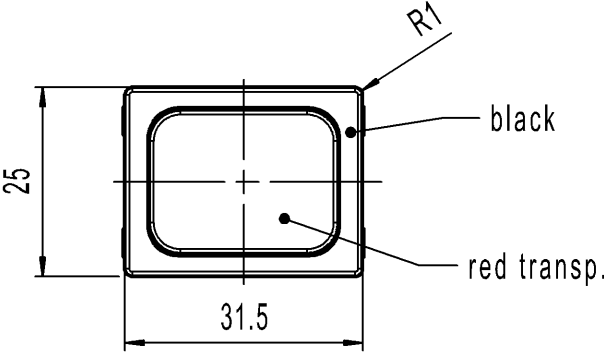




A	1	2	3	4
	recommended cut-out for snap-in fixing (edge opposite to snap-in direction)	wall thickness	length of cut-out	width of cut-out
		0.75 to 1.25	30 -0.1	22+0.2
		1.25 to 2	30.2 -0.1	22+0.2
		2 to 3	30.6 -0.1	22+0.2
B				
				
C				
D				
E	Marking 1837. 230V AC T100 IP40 Pilot Light Neon lamp with Rv for 230 V AC Suitable for appliances of class II The light source of this recessed signal light is non-replaceable; Once the light source has reached the end of it's lifespan, the entire recessed signal light must be replaced. 			

Code of manufacture: place/year/week

-	-	-	1837.8102-XX
Figure	Type	Customer Part No.	Art.No.-PI
Shape and location 	Angle $\pm 2^\circ$	Sheet 01	
	Edge tolerance	Ident.	Document number
	Length	K	18378102
	Radii	Index	f
All dimensions are in millimetres		Pilot light	
f	158929	2025-10-09	HHE
e	141194	2022-09-30	MOHITEN
d	69573	2010-07-28	HHE
c	24370	1996-11-26	GRH
Index	MEC-No.	Date (YYYY-MM-DD)	Edited by
System NX V2306		Replacement of	
Zg.gl.Nr.v.02.03.1994		MARQUARDT	