




	1	2	3	4
A	recommended cut-out for snap-in fixing (edge opposite to snap-in direction)	wall thickness	length of cut-out	width of cut-out
		0.75 to 1.25	30 -0.1	11+0.1
		1.25 to 2	30.2 -0.1	11+0.1
		2 to 3	30.6 -0.1	11+0.1

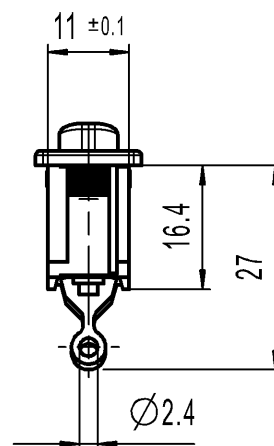

SPDT
With centre-off
Biased from both sides
Suitable for appliances of class II

Marking

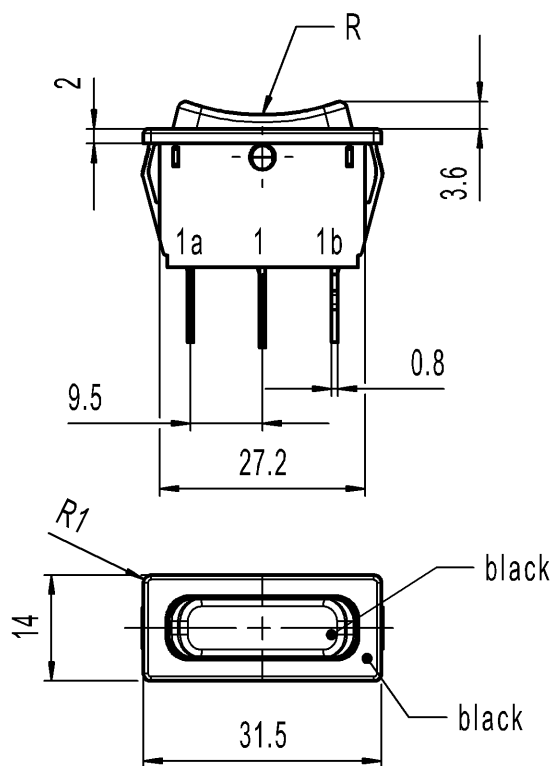



1838.
16(4)/250~T105/55



16A 125-250V AC
1/3 HP 125V AC
1/2 HP 250V AC
R 135 

Code of manufacture: place/year/week



-		-						-		1838.0305-XX					
Figure		Type						Customer Part No.		Art.No.-PI					
								Sheet 01		Ident.	Document number	Index			
Shape and location 		Angle ± 2 °		Length				Radii		Format DIN A4		Scale 1:1	K	18380305	d
				0-6	± 0.2		±		± 0.2						
		>6-15	± 0.4		±		±								
		>15-30	± 0.4		±		±								
			±		±		±								
			±		±		±								
			±		±		±								
			±		±		±								
		d	141194	2022-09-25		MOHITEN		All dimensions are in millimetres		Appliance Switch					
c	94556	2015-03-12		HHE		System NX V1899									
b	29985	2000-08-07		GRH											
a	29631	2000-06-29		GRH		Replacement of Zg.gl.Nr.v.29.06.2000									
Index	MEC-No.	Date (YYYY-MM-DD)		Edited by											
															