
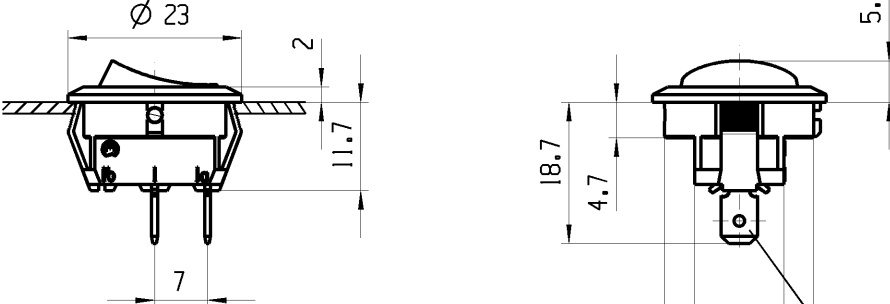
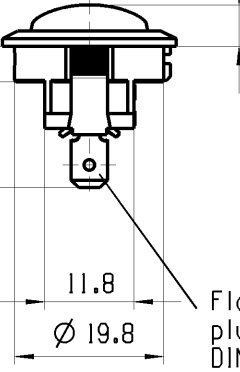






	1	2	3	4																																																																								
A	Empfohlener Plattenausschnitt suggested panel cutout 	Plattendicke panel thickness	X																																																																									
		0.75-1.25	21.2 -0.1																																																																									
		1.25-2.00	21.4 -0.1																																																																									
		2.00-3.00	21.8 -0.1																																																																									
B																																																																												
C	 Flachstecker aehnli. plug-in sim. DIN 46 244-A4.8-0.8																																																																											
D	 schwarz black Wippe schwarz Zeichen weiss rocker black symbol white																																																																											
E	Aufschrift Marking 18.. 8(81)/250~5E4 12(41)/250~ 5/70A 250V~ T100/55  05 R149  Aufschriftbeschreibung marking description R149: 15A 125-250V AC 3/4 HP 125V AC 1 1/2 HP 250V AC Ausschalter 1-polig Fuer Gerate der Klasse II geeignet Wippe und Gehaeuse V0-Material SPST suitable for appliances of class II rocker and housing V0-material G:Konform nach IEC 60335-1:2001 Kap.30 G:matching IEC 60335-1:2001 clause 30 Auf Verpackung/on box: G																																																																											
<table><tr><td rowspan="2">fuer Form und Lage FOR SHAPE AND LOC.</td><td rowspan="2">☉ =</td><td colspan="3">Allgemeintoleranzen UNTOLERANCED DIMENSIONS</td><td rowspan="2">Pause COPY</td><td rowspan="2">Blatt SHEET 01</td><td rowspan="2">TYP</td><td rowspan="2">Zeichn./DRAWING NO.</td><td rowspan="2">Index</td></tr><tr><td>PROJEKTION</td><td>Abmasse und Nennmassbereiche Angaben in mm</td><td>Laenge LENGTH</td><td>Radien RADIUS</td></tr><tr><td rowspan="2">fuer Winkel FOR ANGLE ± 2</td><td rowspan="2"></td><td rowspan="2"></td><td>0-6</td><td>± 0.2</td><td>± 0.2</td><td rowspan="2">Original Din A4</td><td rowspan="2">Massstab SCALE 1 : 1 30mm</td><td rowspan="2">K</td><td rowspan="2">18811106</td><td rowspan="2">a</td></tr><tr><td>>6-15</td><td>± 0.4</td><td>± 0.4</td></tr><tr><td></td><td></td><td></td><td>>15-30</td><td>± 0.4</td><td>± 0.4</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td>>30-70</td><td>±</td><td>± 10%</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td>>70-120</td><td>±</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td>>120-200</td><td>±</td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> CAD: NX V2.0 gez./DRAWN BY 02/03/06 MUT gepr./CHECKED BY Ersatz fuer/REPLACEMENT OF V05140500 GERAETESCHALTER appliance switch  MARQUARDT					fuer Form und Lage FOR SHAPE AND LOC.	☉ =	Allgemeintoleranzen UNTOLERANCED DIMENSIONS			Pause COPY	Blatt SHEET 01	TYP	Zeichn./DRAWING NO.	Index	PROJEKTION	Abmasse und Nennmassbereiche Angaben in mm	Laenge LENGTH	Radien RADIUS	fuer Winkel FOR ANGLE ± 2			0-6	± 0.2	± 0.2	Original Din A4	Massstab SCALE 1 : 1 30mm	K	18811106	a	>6-15	± 0.4	± 0.4				>15-30	± 0.4	± 0.4									>30-70	±	± 10%									>70-120	±										>120-200	±						
fuer Form und Lage FOR SHAPE AND LOC.	☉ =	Allgemeintoleranzen UNTOLERANCED DIMENSIONS					Pause COPY	Blatt SHEET 01	TYP						Zeichn./DRAWING NO.	Index																																																												
		PROJEKTION	Abmasse und Nennmassbereiche Angaben in mm	Laenge LENGTH	Radien RADIUS																																																																							
fuer Winkel FOR ANGLE ± 2			0-6	± 0.2	± 0.2	Original Din A4	Massstab SCALE 1 : 1 30mm	K	18811106	a																																																																		
			>6-15	± 0.4	± 0.4																																																																							
			>15-30	± 0.4	± 0.4																																																																							
			>30-70	±	± 10%																																																																							
			>70-120	±																																																																								
			>120-200	±																																																																								
<table><tr><td>Ausg. ISSUE</td><td>Aenderung REVISION</td><td>gez. DRAWN BY</td><td>Ausg. ISSUE</td><td>Aenderung REVISION</td><td>gez. DRAWN BY</td></tr><tr><td></td><td>54873</td><td>10/26/07 LX</td><td></td><td></td><td></td></tr><tr><td></td><td>45331</td><td>03/03/06 MUT</td><td></td><td></td><td></td></tr></table>					Ausg. ISSUE	Aenderung REVISION	gez. DRAWN BY	Ausg. ISSUE	Aenderung REVISION	gez. DRAWN BY		54873	10/26/07 LX					45331	03/03/06 MUT																																																									
Ausg. ISSUE	Aenderung REVISION	gez. DRAWN BY	Ausg. ISSUE	Aenderung REVISION	gez. DRAWN BY																																																																							
	54873	10/26/07 LX																																																																										
	45331	03/03/06 MUT																																																																										