


A	1	2	3	4
	recommended cut-out for snap-in fixing (edge opposite to snap-in direction)	wall thickness	length of cut-out	width of cut-out
		0.75 to 1.25	19.2 -0.1	6.8+0.1
		1.25 to 2	19.4 -0.1	6.8+0.1
		2 to 3	19.8 -0.1	6.8+0.1



SPST
Suitable for appliances of class II

Marking

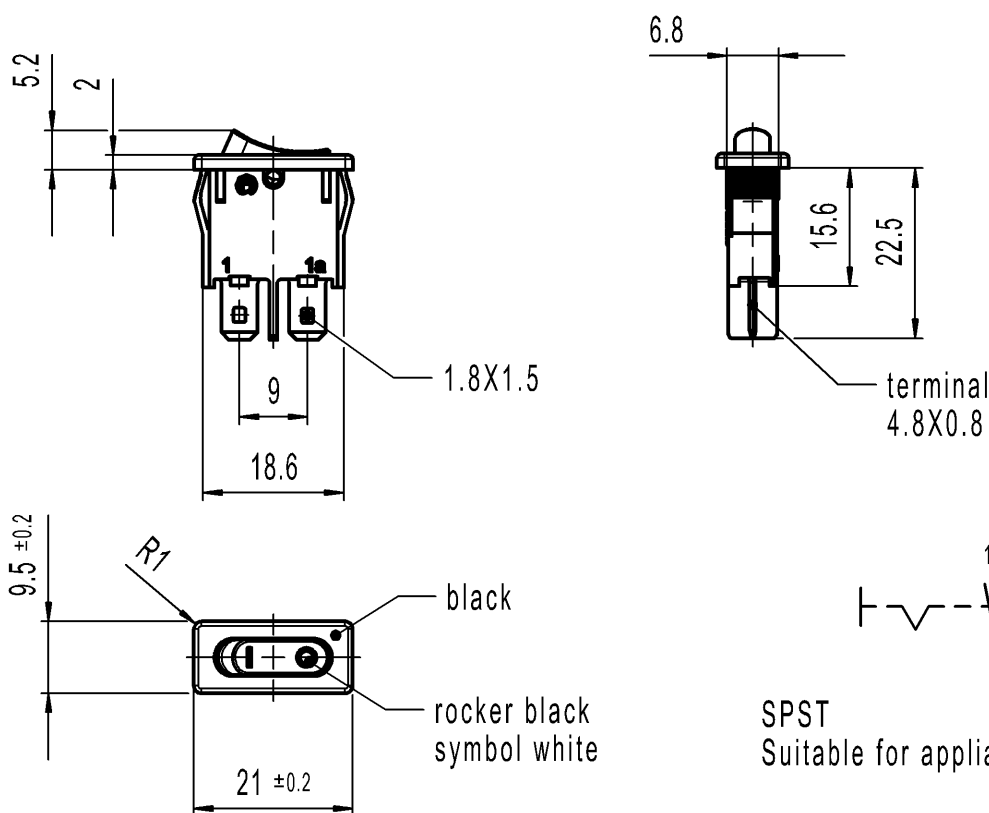

1901.


6(2)A 250V AC


4(1)A 250V AC 5E4

T80/55



Code of manufacture: place/year/week



-		-									1901.1103-XX				
Figure		Type						Customer Part No.			Art.No.-PI				
Shape and location 		Angle ± 2 ° Edge tolerance 		Length				Radii		Sheet 01			Ident. K	Document number 19011103	Index h
				0-6	± 0.2		±		± 0.2	Format DIN A4	Projection 	Scale 1:1			
				>6-15	± 0.4		±		±						
				>15-30	± 0.4		±		±						
					±		±		±						
					±		±		±						
					±		±		±						
					±		±		±						
					±		±		±						
				h	156589	2025-04-25		MUT		All dimensions are in millimetres			System NX V2306		
g	141238	2022-11-17		MOHITEN											
f	102884	2016-08-10		HHE											
e	43248	2005-05-12		hhe											
Index	MEC-No.	Date (YYYY-MM-DD)		Edited by		Replacement of Zg.gl.Nr.v.31.01.1992									