


1	2		3	4	
recommended cut-out for snap-in fixing (edge opposite to snap-in direction)	wall thickness		length of cut-out	width of cut-out	
	0.75 to 1.25		19.2 -0.1	6.8+0.1	
	1.25 to 2		19.4 -0.1	6.8+0.1	
	2 to 3		19.8 -0.1	6.8+0.1	




Marking

1901.
6(2)A 250V AC
4(1)A 250V AC 5E4
T80/55

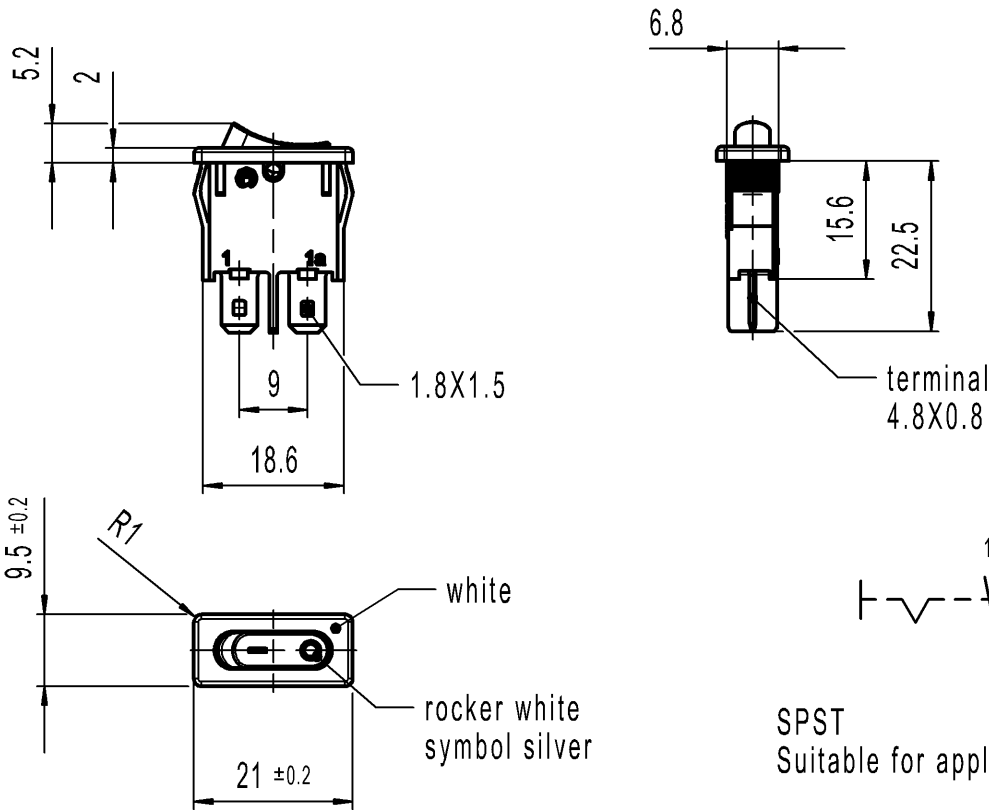

Code of manufacture: place/year/week



-		-				-		1901.1106-XX				
Figure		Type				Customer Part No.		Art.No.-PI				
Shape and location ⊙ ≡ Angle ± 2 ° Edge tolerance Length 0-6 ± 0.2 ± >6-15 ± 0.2 ± >15-30 ± 0.4 ± ± ± ± ± ± Radii ± 0.2 ± 0.3 ± 0.5 ± ± ± ± ±						Sheet 01		Ident.	Document number	Index		
						Format DIN	Projection	Scale	K	19011106	C	
						A4		1:1	Appliance Switch			
						All dimensions are in millimetres						
						c	156589	2025-03-17	MUT			System NX V2007
						b	141238	2023-01-23	MOHITEN			
						a	102884	2016-06-22	HHE			
							48192	2006-08-04	SA			
						Index	MEC-No.	Date (YYYY-MM-DD)	Edited by			Replacement of Zg.gl.Nr.v.04.08.2006
						MARQUARDT						