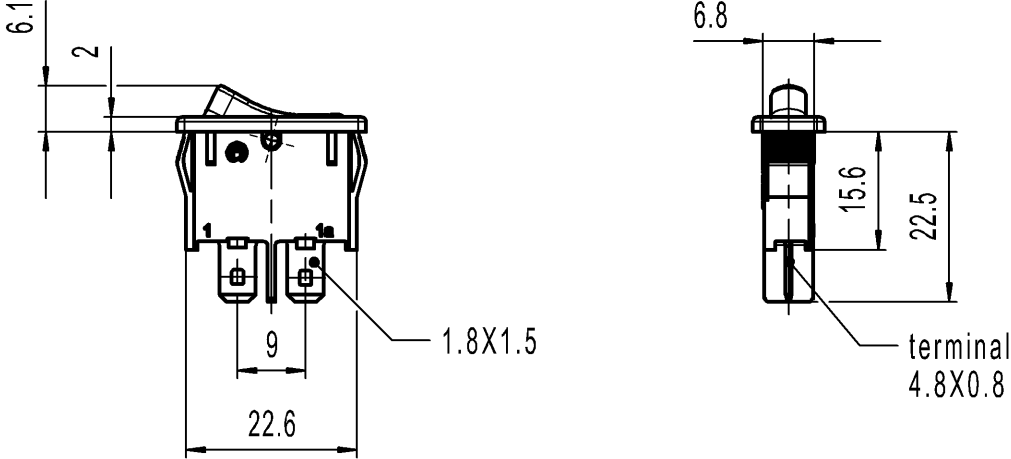
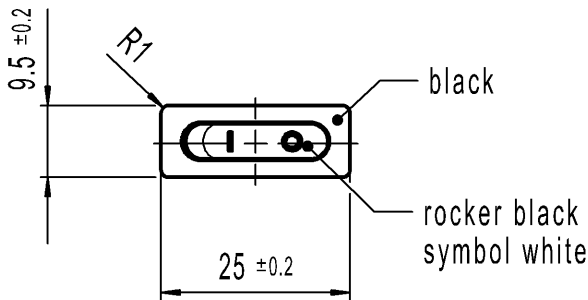





	1	2	3	4
A	recommended cut-out for snap-in fixing (edge opposite to snap-in direction)	wall thickness	length of cut-out	width of cut-out
		0.75 to 1.25	23.2 -0.1	6.8+0.1
		1.25 to 2	23.4 -0.1	6.8+0.1
		2 to 3	23.8 -0.1	6.8+0.1
B				
C				
D	 SPST Suitable for appliances of class II			
E	Marking  1911. 6(2)A 250V AC 4(1)A 250V AC 5E4 T80/55   Code of manufacture: place/year/week On box: Customer Part No. see variant table 			

-	-	0041.0661	1911.1104-XX
Figure	Type	Customer Part No.	Art.No.-PI
Shape and location 	Angle ± 2 °	Sheet 01	
	Edge tolerance	Ident.	Document number
		K	19111104
		Appliance Switch	
e	156589	2025-04-07	MUT
d	141238	2023-01-25	MOHITEN
c	117433	2018-06-15	MUT
b	102884	2016-06-22	HHE
Index	MEC-No.	Date (YYYY-MM-DD)	Edited by
Format DIN A4 Projection  Scale 1:1 All dimensions are in millimetres		System NX V2007	Replacement of Zg.gl.Nr.v.12.07.1999
		 MARQUARDT	