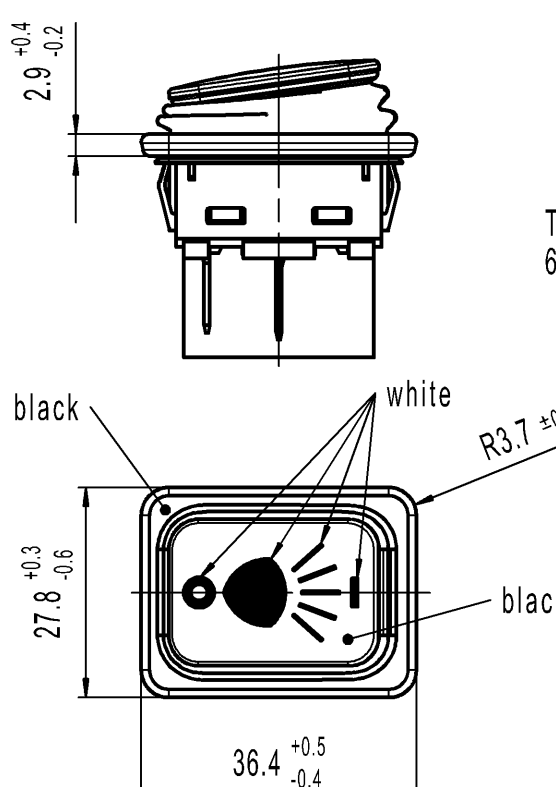
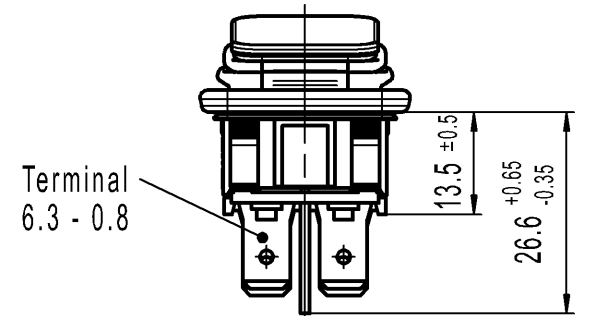



A	1	2	3	4
	Recomended cut-out for snap-in fixing (edge opposite to snap-in direction)		wall thickness	lenght of cut-out
B			0.75 to 1.25	30 -0.1
			1.25 to 3	30.2 -0.1
C				22 +0.2
				22 +0.2
D	The IP-protection class mentioned in our documents of the tightness have to be effected by the customer. Switches with damaged actuating caps have to be replaced immediately.		The mounting into the customer appliance and the testing refers to the actuating side of the switch when mounted into the customer appliance. The sealing between switch and customer appliance is realizable through the surrounding sealing lip of the actuating cap.	
				
E	Marking  193.. 20(4)A 250V AC 10(8)A 250V AC 5E4 T100/55  1 - 2		DPST Suitable for appliances of class II	
	Code of manufacture: place/year/week			

-	-	-	1932.3145-XX
Figure	Type	Customer Part No.	Art.No.-PI
Shape and location	Angle ± 2 °	Sheet 01	
	Edge tolerance	Ident. Document number Index	
	Length	K 19323145 a	
	Radii	Appliance switch	
	0-6 ± 0.15	All dimensions are in millimetres	
	>6-15 ± 0.2	System NX V2007	
	>15-30 ± 0.25	Replacement of	
	>30-70 ± 0.4	MARQUARDT	
	>70-120 ± 0.6		
	>120-200 ± 1.0		
	±		
	±		
a	156088	2025-02-04	HHE
	142143	2022-03-22	HHE
Index	MEC-No.	Date (YYYY-MM-DD)	Edited by