
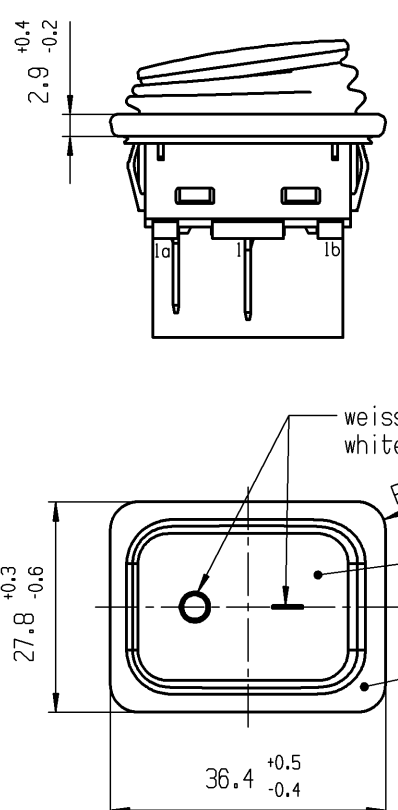
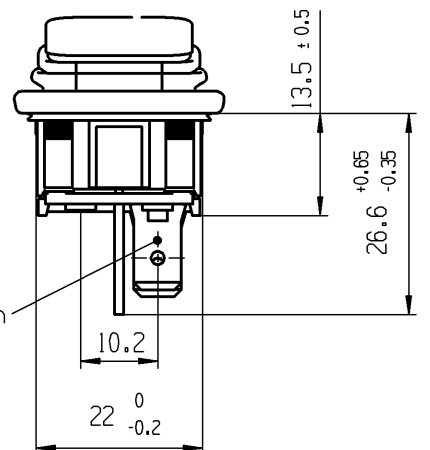


A	1	2	3	4
	Empfohlener Ausschnitt fuer Rastbefestigung (Graf gegenueber Bestueckungsseite recommended cut-out for snap-in fixing (edge opposite to snap-in direction)	Wanddicke wall thickness	Ausschnittlaenge length of cut-out	Ausschnittbreite width of cut-out
B		0.75 bis / to 1.25	30 ^{-0.1}	22 ^{+0.2}
		1.25 bis / to 3	30.2 ^{-0.1}	22 ^{+0.2}
C	Die in unseren Unterlagen angegebene IP Schutzklasse bezieht sich auf die Betaetigungsseite des Schalters, wenn dieser in das Kundengerat eingebaut ist. Die Abdichtung zwischen Schalter und Kundengerat kann ueber die umlaufende Dichtlippe der Betaetigungskappe erfolgen. Die Montage in das Kundengerat und die Pruefung auf Dichtheit an dieser Stelle erfolgen kundenseitig. Schalter mit beschaedigten Betaetigungskappen muessen sofort ausgetauscht werden.		The IP-protection class mentioned in our documents refers to the actuating side of the switch when mounted into the customer appliance. The sealing between switch and customer appliance is realizable through the surrounding sealing lip of the actuating cap. The mounting into the customer appliance and the testing of the tightness have to be effected by the customer. Switches with damaged actuating caps have to be replaced immediately.	
D				
E	Aufschrift Marking  193.. 20(4)A 250V AC 10(8)A 250V AC 5E4 T100/55  15  1  2 Herstellort/-jahr/-woche code of manufacture:place/year/week Auf Verpackung / on box: G		Ausschalter 1-polig Fuer Gerate der Klasse II geeignet SPST suitable for appliances of class II G-Konform nach IEC 60335-1:2001 Kap. 30 G-matching IEC 60335-1:2001 clause 30	



-	-	-	1932.3412-XX
Figure	Type	Customer Part No.	Art.No.-PI
Shape and location 	Angle ± 2 °	Sheet 01	
	Edge tolerance	Ident. Document number Index K 19323412 e	
Length		Format DIN Projection Scale A4  1:1	
Radii		All dimensions are in millimetres	
e	156088	System NX V2007	
d	59503	Replacement of	
c	57621	Zg.gl.Nr.v.14.02.2002	
b	39865	MARQUARDT	
Index	MEC-No.	Date (YYYY-MM-DD)	Edited by