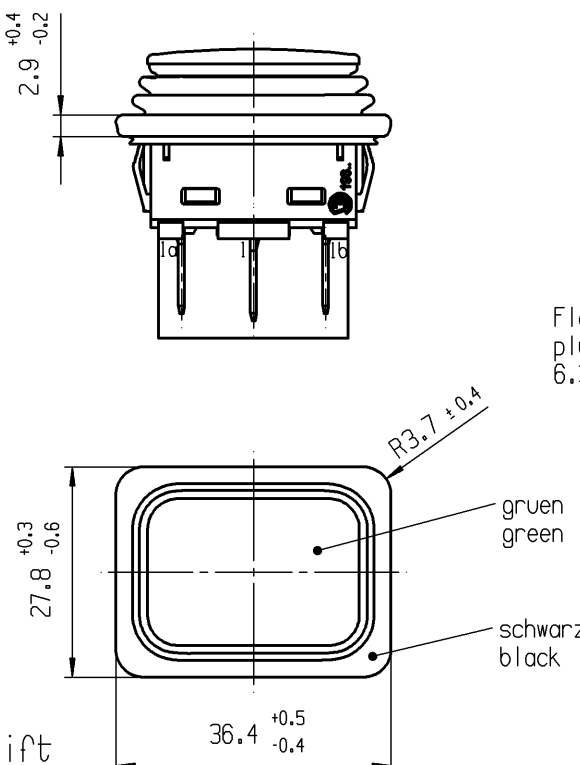
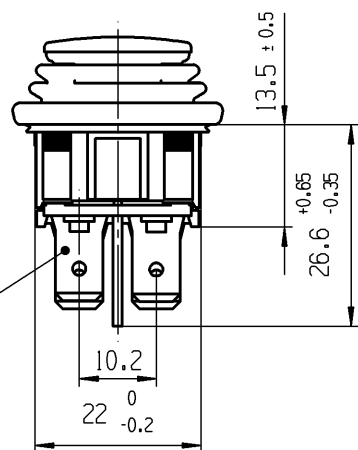




	1	2	3	4
A	Empfohlener Ausschnitt fuer Rastbefestigung (Grat gegenueber Bestueckungsseite recommended cut-out for snap-in fixing (ledge opposite to snap-in direction)	Wanddicke wall thickness 0.75 bis / to 1.25 1.25 bis / to 3	Ausschnittlaenge length of cut-out 30 ^{-0.1} 30.2 ^{-0.1}	Ausschnittbreite width of cut-out 22 ^{+0.2} 22 ^{+0.2}
B	Die in unseren Unterlagen angegebene IP Schutzklasse bezieht sich auf die Betaetigungsseite des Schalters, wenn dieser in das Kundengerat eingebaut ist. Die Abdichtung zwischen Schalter und Kundengerat kann ueber die umlaufende Dichtlippe der Betaetigungskappe erfolgen. Die Montage in das Kundengerat und die Pruefung auf Dichtheit an dieser Stelle erfolgen kundenseitig. Schalter mit beschaeDIGten Betaetigungskappen muessen sofort ausgetauscht werden.			
	The IP-protection class mentioned in our documents refers to the actuating side of the switch when mounted into the customer appliance. The sealing between switch and customer appliance is realizable through the surrounding sealing lip of the actuating cap. The mounting into the customer appliance and the testing of the tightness have to be effected by the customer. Switches with damaged actuating caps have to be replaced immediately.			
C				
D	Aufschrift Marking 193.. 12(14)A 250V AC T100/55 μ   Herstellort/-jahr/-woche code of manufacture: place/year/week		Umschalter 2-polig Ausstellung in der Mitte Tastfunktion beidseitig Fuer Gerate der Klasse II geeignet DPDT with centre-off momentary function both sides suitable for appliances of class II	
E				

-		-				-		1939.3318-XX																																							
Figure		Type				Customer Part No.		Art.No.-PI																																							
Shape and location  Angle ± 2 ° Edge tolerance  Length <table><tr><td>0-6</td><td>± 0.15</td><td>±</td><td>0-6</td><td>± 0.2</td></tr><tr><td>>6-15</td><td>± 0.2</td><td>±</td><td>>6-15</td><td>± 0.3</td></tr><tr><td>>15-30</td><td>± 0.25</td><td>±</td><td>>15-30</td><td>± 0.5</td></tr><tr><td>>30-70</td><td>± 0.4</td><td>±</td><td>>30-200</td><td>± 10%</td></tr><tr><td>>70-120</td><td>± 0.6</td><td>±</td><td></td><td>±</td></tr><tr><td>>120-200</td><td>± 1</td><td>±</td><td></td><td>±</td></tr><tr><td></td><td>±</td><td>±</td><td></td><td>±</td></tr><tr><td></td><td>±</td><td>±</td><td></td><td>±</td></tr></table> Sheet 01 Ident. K Document number 19393318 Index b						0-6	± 0.15	±	0-6	± 0.2	>6-15	± 0.2	±	>6-15	± 0.3	>15-30	± 0.25	±	>15-30	± 0.5	>30-70	± 0.4	±	>30-200	± 10%	>70-120	± 0.6	±		±	>120-200	± 1	±		±		±	±		±		±	±		±	Appliance switch	
						0-6	± 0.15	±	0-6	± 0.2																																					
						>6-15	± 0.2	±	>6-15	± 0.3																																					
						>15-30	± 0.25	±	>15-30	± 0.5																																					
						>30-70	± 0.4	±	>30-200	± 10%																																					
						>70-120	± 0.6	±		±																																					
						>120-200	± 1	±		±																																					
							±	±		±																																					
							±	±		±																																					
						System NX V2007																																									
Index MEC-No.		Date (YYYY-MM-DD)		Edited by		Replacement of Zng.gl.Nr. vom 02.07.04		 MARQUARDT																																							
b 156485		2025-04-07		HHE		All dimensions are in millimetres																																									
a 59141		2008-07-14		VOR		Format DIN A4																																									
		>30-70 ± 0.4		±		Projection 		Scale 1:1																																							
		>70-120 ± 0.6		±																																											
		>120-200 ± 1		±																																											
				±																																											
				±																																											