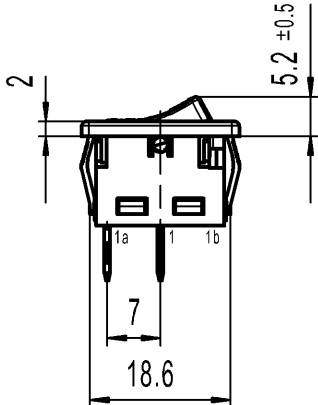
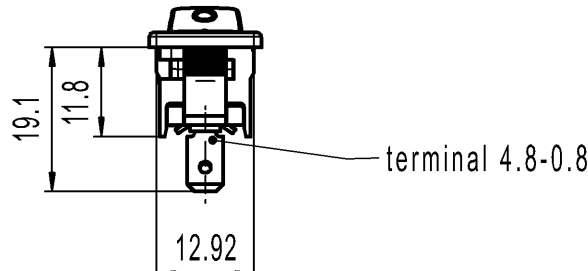
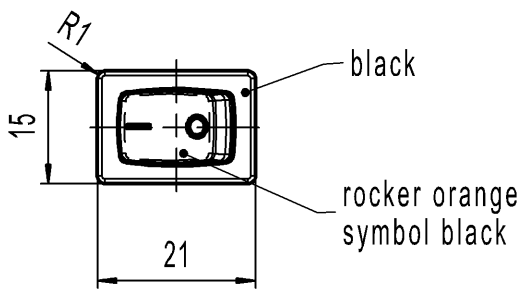




A	1	2	3	4
	recommended cut-out for snap-in fixing (edge opposite to snap-in direction)	wall thickness 0.75 to 1.25 1.25 to 2	length of cut-out 19.2 ^{-0.1} 19.4 ^{-0.1}	width of cut-out 12.9 ^{+0.1} 12.9 ^{+0.1}
B	 			
C	 Attention! "o" - position = "ON" 			
D	Marking Ⓜ 194.. 6(4)/250 ~ 5E4 SPST suitable for appliances of class II			
E	Code of manufacture: place/year/week On box: customer no. see variant table 			

-		-				4314-430-0202-A			1941.1103-XX		
Figure		Type				Customer No.			Item-PI		
General tolerances						Sheet 01			Ident. K	Document number 19411103	Index c
All dimensions are in millimetres		Shape and location 	Angle ± 2 °	Edge tolerance 							
						0-6	± 0.15	± 0.2			
						>6-15	± 0.2	± 0.3			
						>15-30	± 0.25	± 0.5			
						>30-70	±				
						>70-120	±	± 10%			
						>120	±				
Format DIN	Projection 	Scale 1:1									
A4		1:1									
System	NX V11.0										
Replacement of	V06025123										
Appliance Switch											
MARQUARDT											
c	131490	2020-06-29	MUT								
b	58030	2008-05-09	MUT								
a	53490	2007-07-25	MUT								
	49557	2007-06-14	MUT								
Index	MEC-No.	Date (YYYY-MM-DD)	Edited by								