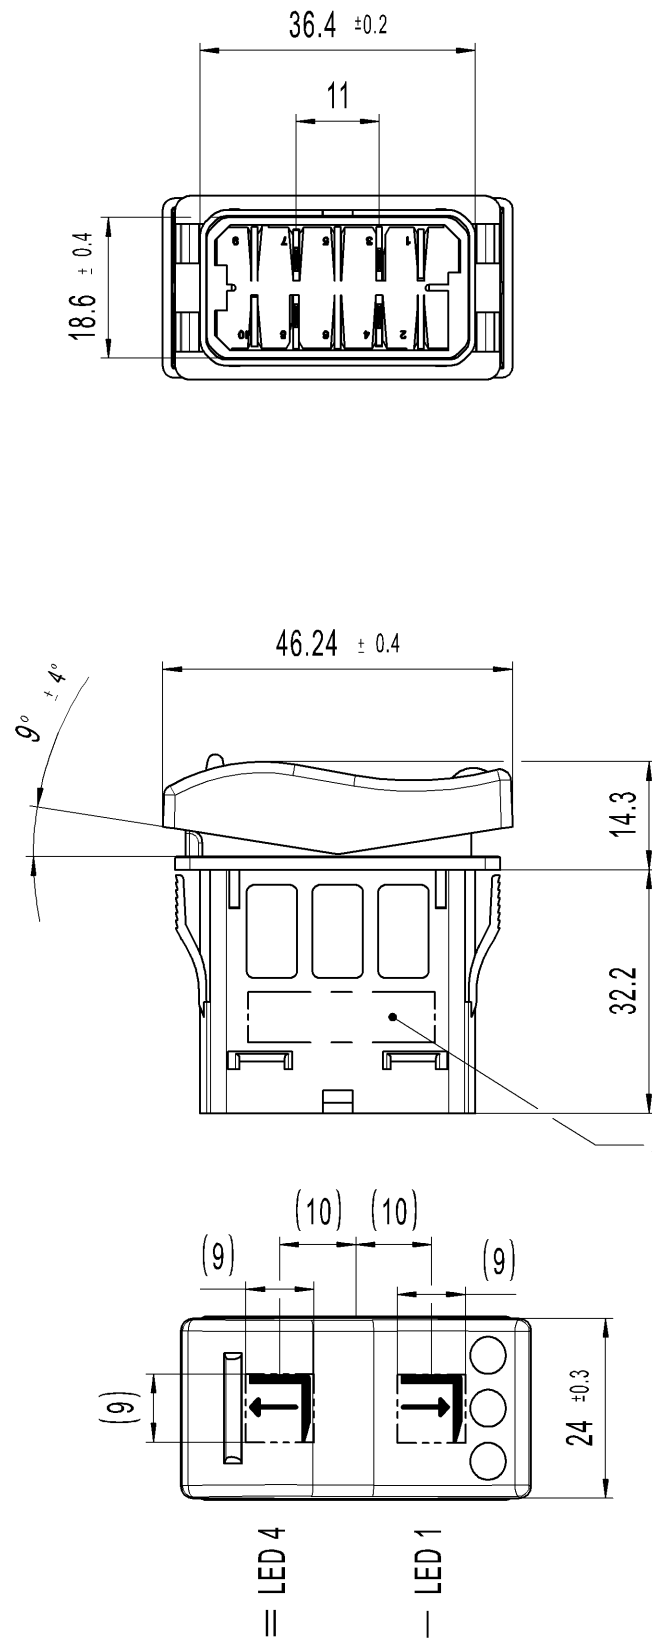
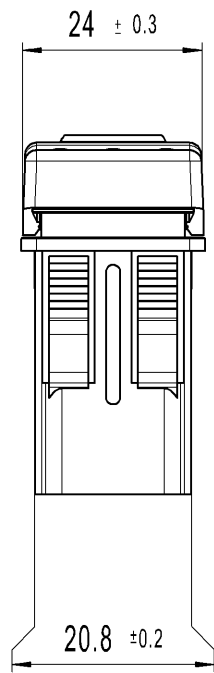


Panel opening

3251.0140-xx
Customer number
Code of manufacturing: place/year/week/day
Straight font, similar to DIN 1451

General features

Storage temperature: -40° bis 85°
Operating temperature: -35° bis 70° C

Electrical specifications

12V DC
Terminals: flat connector 3 x 0.8± 0.025 silver plated
Switch type: snap action

Contact fitting


K1: AgNi contact; Rating ≤ 10 A

Charging

Endurance electrical ≥ 50.000 cycle
Endurance mechanical ≥ 500.000 cycle

Recommended cut-out for snap-in
(edge perpendicular to snap-in direction):
36.8 ± 0.15 x 21.1 ± 0.15

Suggested wall thickness: 1 to 6 mm

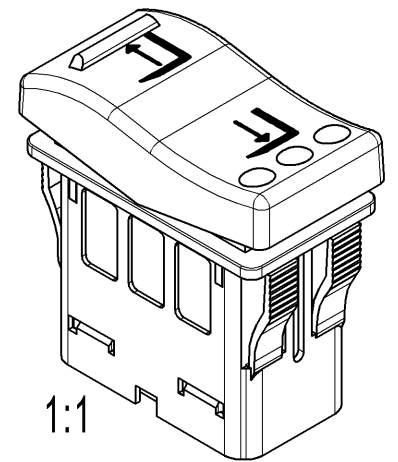

-	-	7915490859	3251.0140-xx
Figure	Type	Customer No.	Art.No.-PI
Shape and location ⊙ = 0.1	Angle ± 2 °	Sheet 01	
	Edge tolerance	Format DIN	Projection
	0.25 +0.1 -0.25	A3	1:1
	0.1	All dimensions are in millimetres	
	0.1	System NX V11.0	
a	135555	2020-12-30	BHAJHASSINEM
	126626	2019-07-17	MAHFOUDHIS
Index	MEC-No.	Date (YYYY-MM-DD)	Edited by
Ident. K		Document number 32510140	Index a
Panel Switch			
MARQUARDT			