


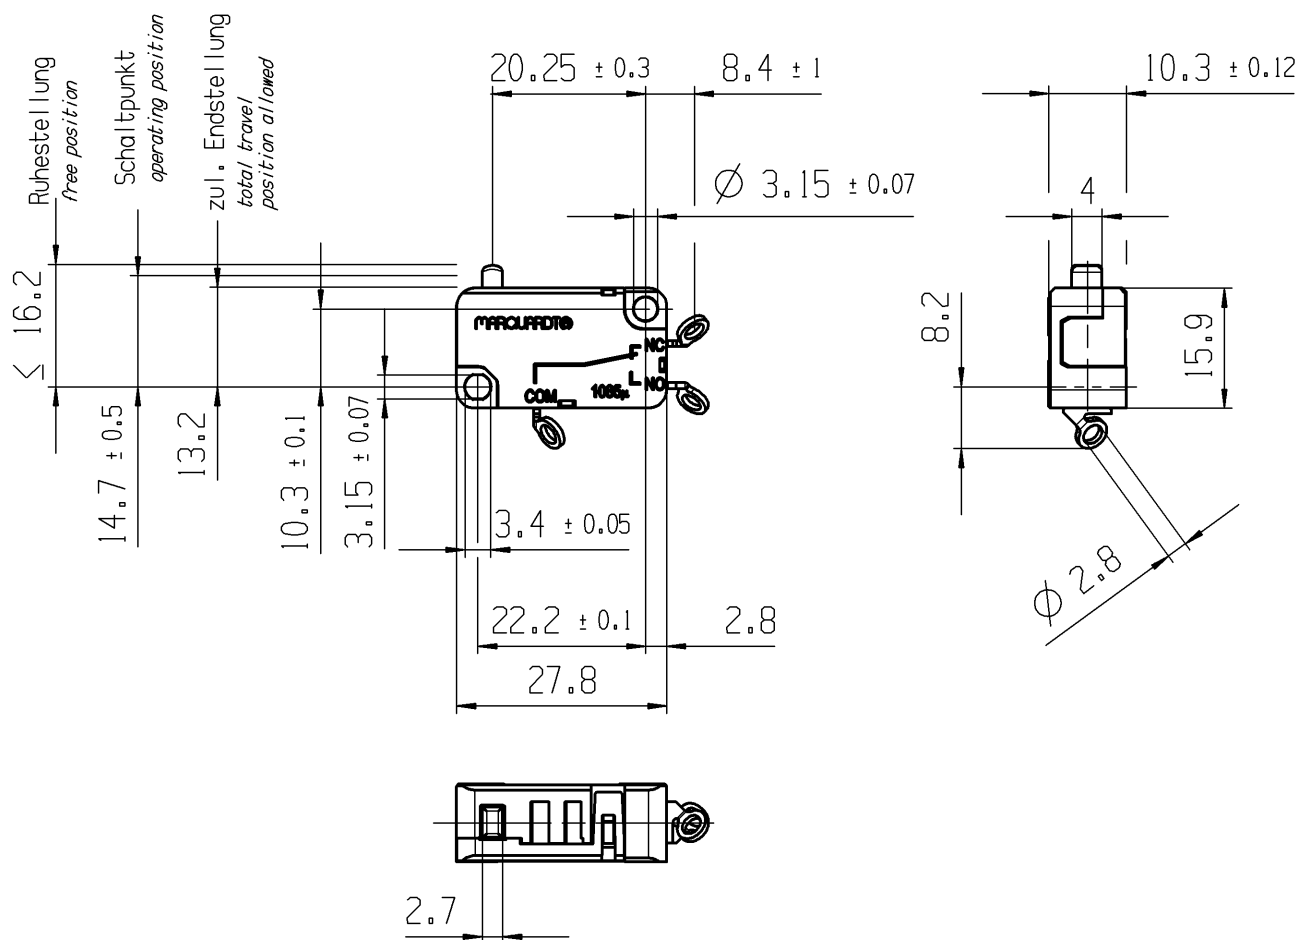

Aufschrift
marking

MARQUARDT 1085 μ T12516(4)/250 ~ 25E3 10


16 A 125 AC 1/2 HP

16 A 250 AC 1/2 HP

R109

Herstellort / -jahr/ -woche

data code of manufacture:
place / year / week



Wechsler 1-polig

single pole changeover

Schalt- Betaetigungskraft
actuating force

 $\leq 4.0 \text{ N}$

Rueckschaltkraft
release force


$$\geq 1.4 \text{ N}$$


Differenzweg
movement differential

 $\leq 0.3 \text{ mm}$

Schutzart nach EN 60529
protection class

IP 40



-		-					-		1085.0103-XX			
Figure		Type					Customer No.		Art.No.-PI			
General tolerances							Sheet 01			Ident. K	Document number 10850103	Index g
All dimensions are in millimetres		Shape and location 	Angle ± 2 °	Edge tolerance 		Length						
					0-6	± 0.1	± 0.2					
					>6-15	± 0.15	± 0.3					
					>15-30	± 0.2	± 0.5					
					>30-70	± 0.3	± 10%					
					>70-120	± 0.4						
>120	± 0.8											
g	123519	2019-06-12		TRIGUIK		Format DIN A4	Projection 	Scale 1:1				
f	112677	2017-11-28		TRIGUIK								
e	63606	2009-07-14		MTR		System NX V11.0						
d	32889	2001-12-04		VOR								
Index	MEC-No.	Date (YYYY-MM-DD)		Edited by		Replacement of Zg.gl.Nr.v.07.03.1994			 MARQUARDT			